


Pages 8-11

CENTRIFUGAL FANS




Pages 12-15

UTILITY SETS

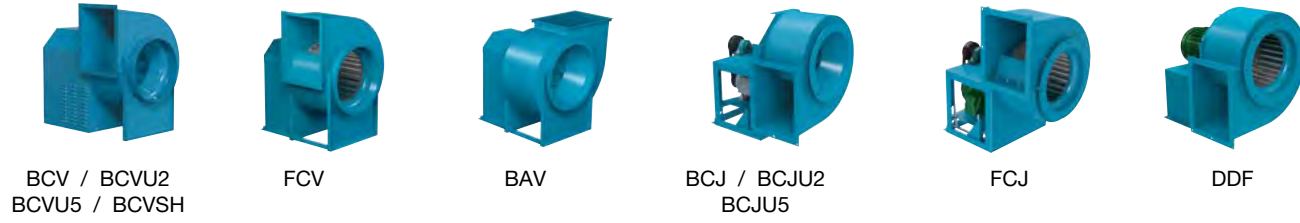

Pages 16-19

INLINE & MIXED FLOW FANS

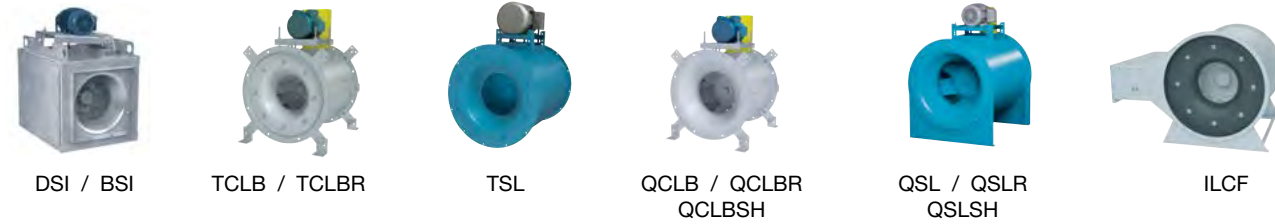

Pages 20-23

PLENUM FANS




Pages 24-25

PLUG FANS




Page 32

CENTRIFUGAL FILTERED SUPPLY FANS

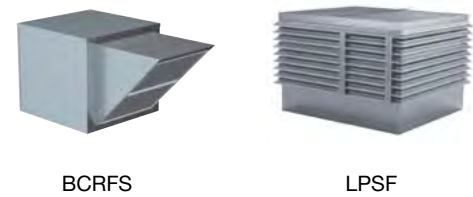


Page 33

CEILING & CABINET VENTILATORS

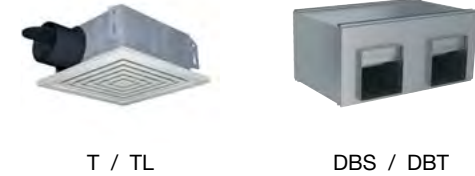

Pages 26-31

CENTRIFUGAL ROOF & WALL EXHAUSTERS

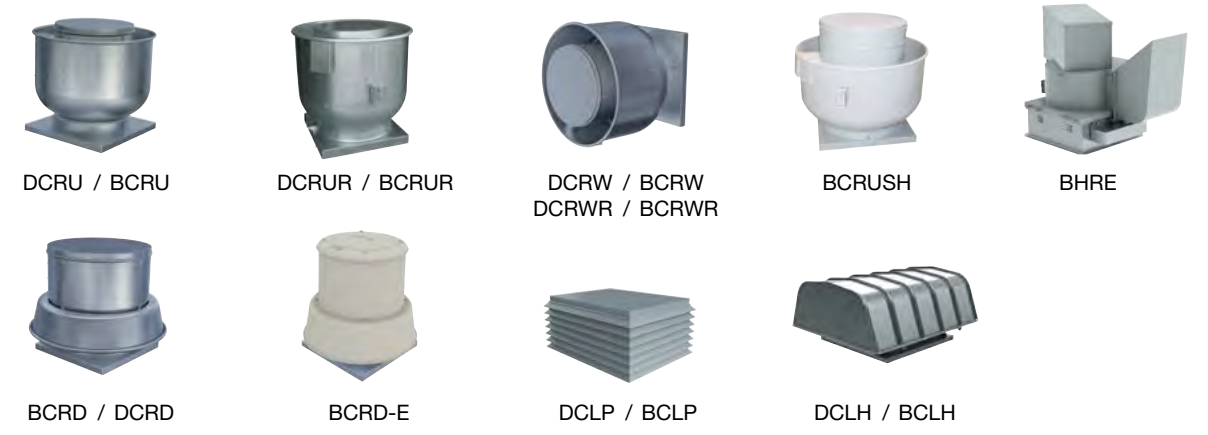


Pages 34

GRAVITY VENTILATORS



Pages 36-37

PROPELLER WALL FANS

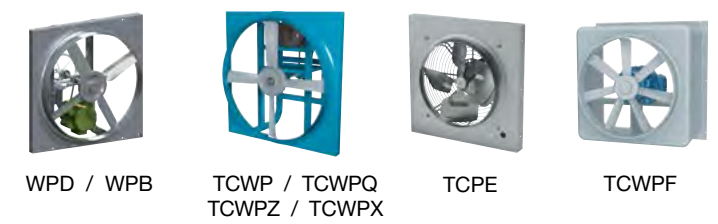

Pages 35

MANGCOOLERS




Pages 38-43

VANEAXIAL FANS



Pages 38-43

TUBEAXIAL FANS

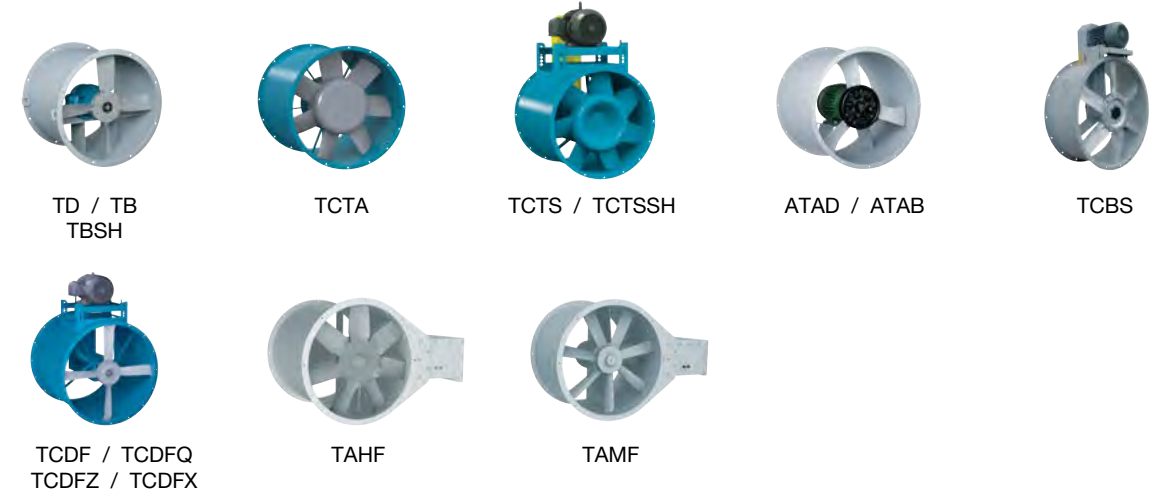


Pages 44-49
PROPELLER ROOF VENTILATORS




Pages 50-53
RADIAL BLADED FANS



Pages 54-55
RADIAL TIP & HIGH EFFICIENCY FANS

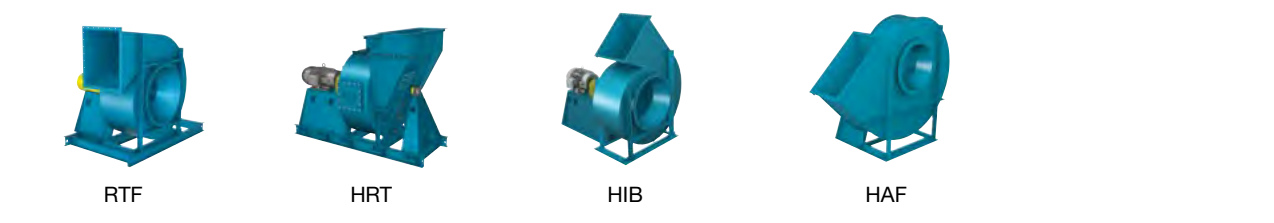

Pages 56-59
PRESSURE BLOWERS

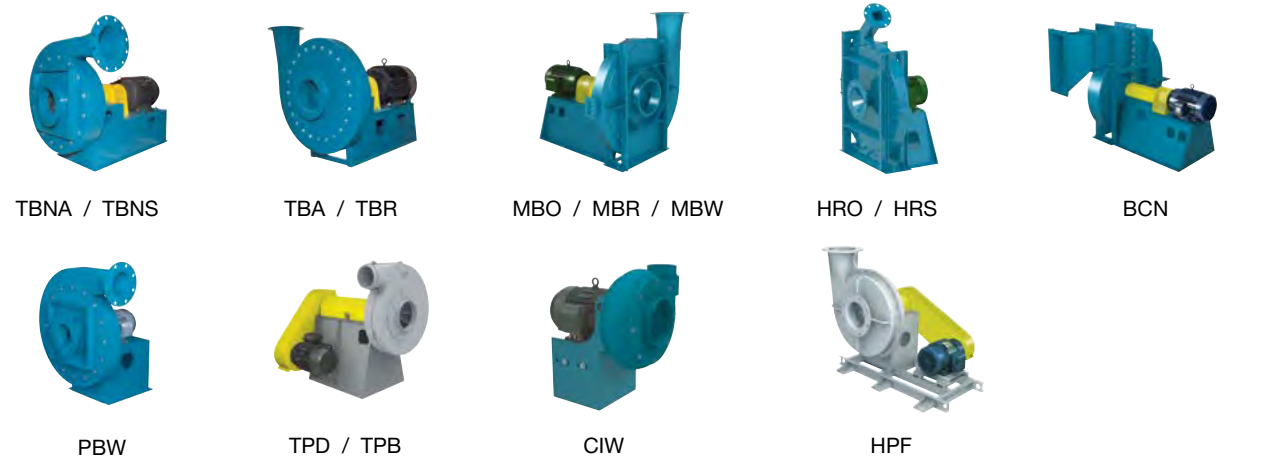

Pages 60-63
LABORATORY & FUME HOOD EXHAUST FANS



Pages 64-69
FIBERGLASS FANS



Pages 70-73
KITCHEN & RESTAURANT EXHAUST FANS



Pages 74-77
SMOKE & HEAT EXHAUST FANS

























Pages 78-79
FC & BI DWDI VENTCO BLOWERS




UNMATCHED PRODUCT OFFERINGS

PRODUCT INDEX

	Centrifugal Fans.....	8-11
	Utility Sets.....	12-15
	Inline Centrifugal Fans.....	16-19
	Mixed Flow Fans.....	16-19
	Plenum Fans.....	20-23
	Plug Fans.....	24-25
	Centrifugal Roof & Wall Exhausters.....	26-31
	Centrifugal Filtered Supply Fans.....	32
	Ceiling & Cabinet Ventilators.....	33
	Gravity Ventilators.....	34
	Mancoolers.....	35
	Propeller Wall Fans.....	36-37
	Axial Fans.....	38-43
	Propeller Roof Ventilators.....	44-49
	Radial Bladed Fans.....	50-53
	Radial Tip & High Efficiency Fans.....	54-55
	Pressure Blowers.....	56-59
	Laboratory & Fume Hood Exhaust Fans.....	60-63
	Fiberglass Fans.....	64-69
	Kitchen & Restaurant Exhaust Fans.....	70-73
	Smoke & Heat Exhaust Fans.....	74-77
	FC & BI DWDI Ventco Blowers.....	78-79

► TCF.COM RESOURCES

Our website offers a wealth of knowledge, including product catalogs, installation manuals and a wide variety of fan-related engineering information for more than 200 product lines. To learn more, visit us at tcf.com.

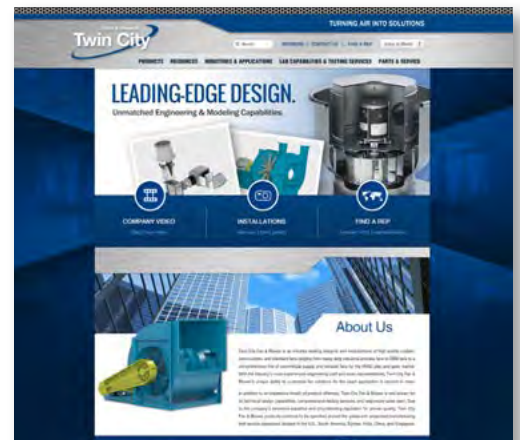

Product Catalogs



Case Studies



I&M Manuals



Revit Files



Product Specifications



Fan Calculator



Engineering Topics



Video Library



Installation Photos



OVERVIEW

CENTRIFUGAL FANS

Centrifugal Fans are designed for general HVAC and industrial applications where large volumes of clean air are required at low to moderate pressures. With backward inclined, backward curved, backward inclined airfoil and forward curved impeller types, centrifugal fans offer the flexibility to match the performance and application at the highest efficiency. Most models are available in single-wide or double-wide configurations which allow for even higher volumes of air.

WHEEL TYPES

Single Thickness Backward Inclined, Backward Curved, Forward Curved, Airfoil

TYPICAL INDUSTRIES

General HVAC (exhaust, filtration, return and supply, air of commercial buildings), Automotive, Fertilizer, Metal & Mineral Processing, Pulp & Paper, Petrochemical, Pharmaceutical, Power, Water & Wastewater Treatment

COMMON ACCESSORIES

Access Door, Drain, Flanged Inlet/Outlet, Companion Flanges, Inlet/Outlet Screens, Shaft Guard, Bearing Guard, Belt Guard, Shaft Seal, Lube Lines, Piezometer Ring, Split Housing, Insulation Pins, Steel Wall or Aluminum Clad Insulated Housing, Inlet Box, Inlet & Outlet Dampers, External or Nested Inlet Vanes

OPTIONAL CONSTRUCTION

High Temperature, Swingout, Split Housings, Special Materials, Spark Resistant Construction (Type A, B, and C), Nominally Leak-Tight Construction, ATEX

CERTIFICATIONS


AMCA Sound/Air and FEG, UL 705 Listed for Electrical



Model BC-SW
Supply & Exhaust



Model BCS
Regenerative Thermal Oxidizer

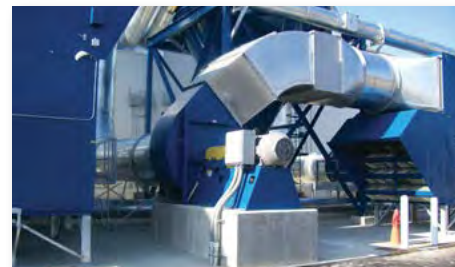

Model BCS
Dust Collection




Model BCS
Regenerative Thermal Oxidizer

BAE-SW

AIRFOIL WHEEL, SWSI

- > 12.25 to 98.25 inches (315 mm to 2,495 mm) wheel diameters
- > Airflow to 233,100 CFM (396,000 m³/hour)
- > Static pressure to 20 inches w.g. (4,970 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listing available
- > **Typical Applications:** Aeration, Forced Draft, Exhaust Applications, Air Handling Units, Process Cooling, Clean Rooms, Explosion-Proof Processes, General HVAC, Green/LEED, Filtration Systems

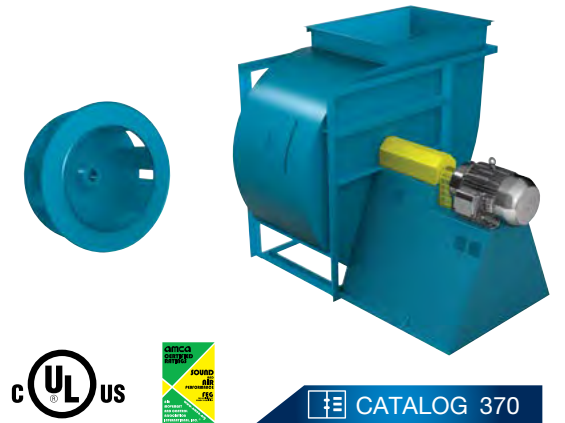


CATALOG 370

BAE-DW

AIRFOIL WHEEL, DWDI

- > 12.25 to 98.25 inches (315 mm to 2,495 mm) wheel diameters
- > Airflow to 419,500 CFM (712,700 m³/hour)
- > Static pressure to 14 inches w.g. (3,480 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listing available
- > **Typical Applications:** Aeration, Air Handling Units, Exhaust Applications, Explosion-Proof Processes, Clean Rooms, General HVAC, Green/LEED

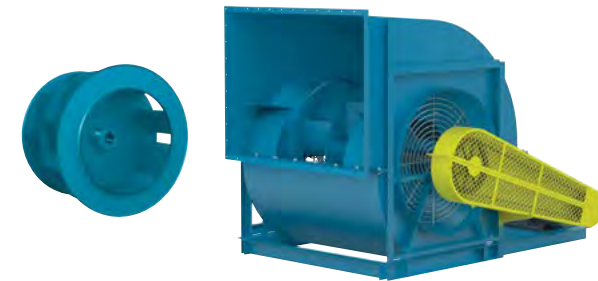


CATALOG 370

BAF-SW

AIRFOIL WHEEL, SWSI

- > 12.25 to 98.25 inches (315 mm to 2,495 mm) wheel diameters
- > Airflow to 277,500 CFM (471,500 m³/hour)
- > Static pressure to 20 inches w.g. (4,970 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listing available
- > **Typical Applications:** Air Handling Units, Exhaust Applications, Explosion-Proof Processes, General HVAC, Green/LEED

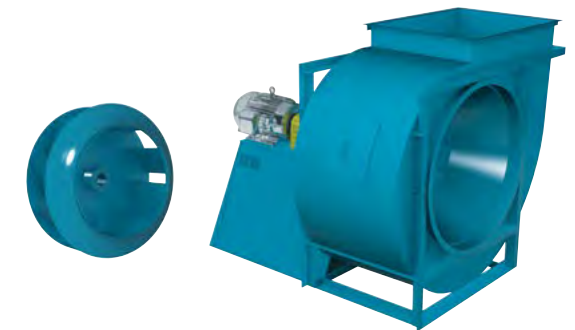


FAN SELECTOR


BAF-DW

AIRFOIL WHEEL, DWDI

- > 12.25 to 89 inches (315 mm to 2,260 mm) wheel diameters
- > Airflow to 344,300 CFM (585,000 m³/hour)
- > Static pressure to 14 inches w.g. (3,480 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listing available
- > **Typical Applications:** Air Handling Units, Exhaust Applications, Explosion-Proof Processes, General HVAC, Green/LEED

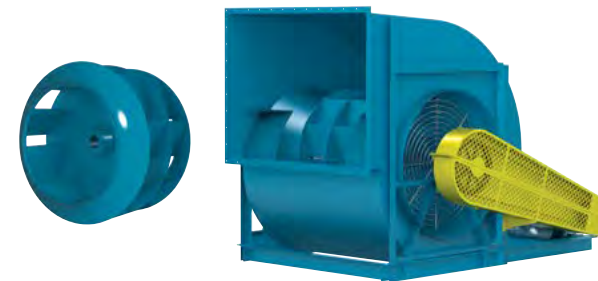

FAN SELECTOR

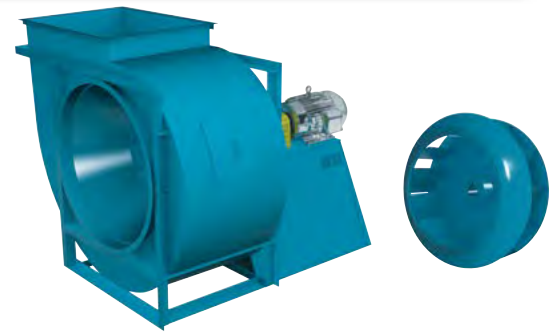

BC-SW

FLAT-BLADED BACKWARD INCLINED WHEEL, SWSI

- > 12.25 to 98.25 inches (315 mm to 2,495 mm) wheel diameters
- > Airflow to 277,500 CFM (471,500 m³/hour)
- > Static pressure to 20 inches w.g. (4,970 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listing available
- > **Typical Applications:** Air Pollution Control, High Temperature, Chemical/Corrosive Environments, Exhaust, Water Treatment, Filtration/Dust Collection, Explosion-Proof Processes, General HVAC, Green/LEED, General Manufacturing, Drying Applications




CATALOG 300


BAFF

BACKWARD INCLINED AIRFOIL WHEEL, COMPOSITE FAN

- > 12.4 to 39.4 inches (315 mm to 1,000 mm) wheel diameters
- > Airflow to 31,100 CFM (52,800 m³/hour)
- > Static pressure to 13 inches w.g. (3,230 Pa)
- > **Typical Applications:** Chemical/Corrosive Environments, Marine, Water Treatment, Exhaust Applications, Process Air, Explosion-Proof Processes, Air Pollution Control, High Moisture Environments, General HVAC

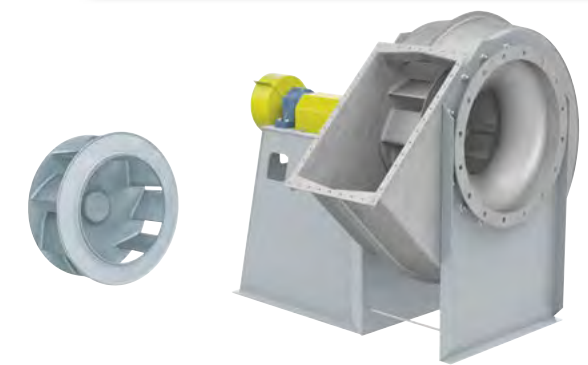

CATALOG 430

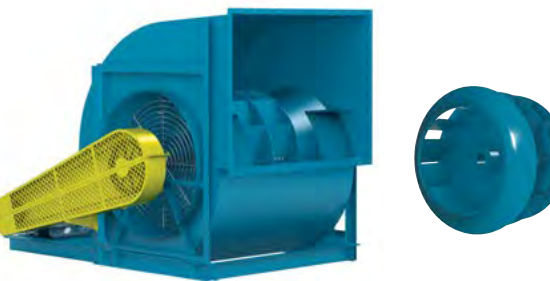

BC-DW

FLAT-BLADED BACKWARD INCLINED WHEEL, DWDI

- > 12.25 to 89 inches (315 mm to 2,260 mm) wheel diameters
- > Airflow to 344,300 CFM (585,000 m³/hour)
- > Static pressure to 14 inches w.g. (3,480 Pa)
- > AMCA licensed for Air and Fan Efficiency Grade
- > UL 705 listing available
- > **Typical Applications:** Exhaust Applications, Dust Collection, Explosion-Proof Processes, General HVAC, Green/LEED




CATALOG 300


TCBI

FLAT-BLADED BACKWARD INCLINED CENTRIFUGAL FAN, SWSI

- > 14.19 to 19.69 inches (360 mm to 500 mm)
- > 3 HP to 30 HP
- > Airflow to 12,680 CFM (21,500 m³/hour)
- > Static pressures to 18.4 inches w.g. (4,570 Pa)
- > **Typical Applications:** Dust Collection

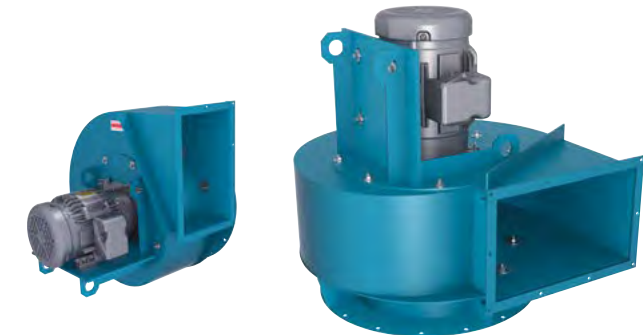

CATALOG 330

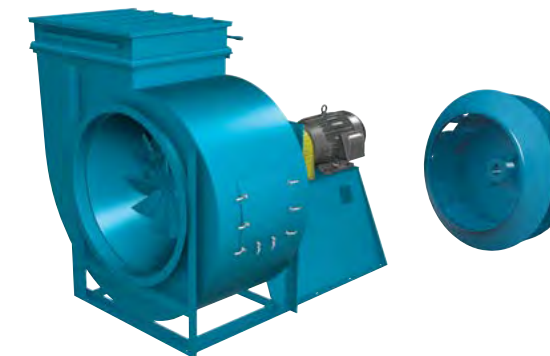

BCS

BACKWARD CURVED WHEEL, HIGH PRESSURE/HIGH VOLUME

- > 16.5 to 89 inches (420 mm to 2,265 mm) wheel diameters
- > Airflow to 291,400 CFM (495,100 m³/hour)
- > Static pressure to 40 inches w.g. (9,950 Pa)
- > **Typical Applications:** Air Pollution Control, High Temperature, Chemical/Corrosive Environments, Exhaust, Water Treatment, Filtration/Dust Collection, Explosion-Proof Processes, General HVAC, Green/LEED, General Manufacturing, Drying Applications

CATALOG 400

NFC-SW, NFC-DW, FC-DW

FORWARD CURVED CENTRIFUGAL WHEEL, SWSI & DWDI

- > 12.25 to 49 inches (315 mm to 1,245 mm) wheel diameters
- > Airflow to 96,500 CFM (164,000 m³/hour)
- > Static pressure to 4 inches w.g. (990 Pa)
- > **Typical Applications:** Air Handling Units, Exhaust Applications, Energy Recovery, Explosion-Proof Processes, General HVAC, High Temperature, Green/LEED



CATALOG 150



BCSF

BACKWARD CURVED WHEEL, HIGH PRESSURE COMPOSITE FAN


- > 16.5 to 60 inches (420 mm to 1,525 mm) wheel diameters
- > Airflow to 147,000 CFM (249,800 m³/hour)
- > Static pressure to 26 inches w.g. (6,460 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > **Typical Applications:** Chemical/Corrosive Environments, Marine, Water Treatment, Exhaust Applications, Process Air, Explosion-Proof Processes, Air Pollution Control, High Moisture Environments, General HVAC



CATALOG 410

EASY ACCESS & SPLIT HOUSINGS


AVAILABLE ON THE FOLLOWING MODELS

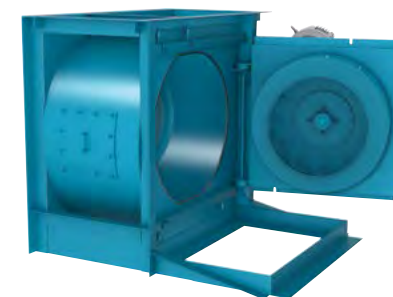


Easy Access Swingout Construction



- > BC-SW & BC-DW
- > BAE-SW & BAE-DW
- > BAF-SW & BAF-DW
- > BCS
- > NFC-SW & NFC-DW

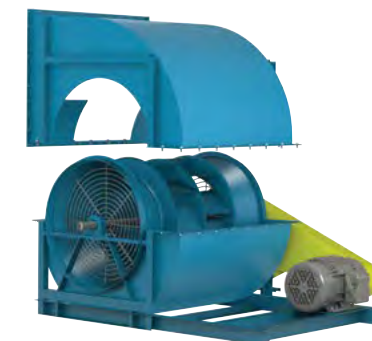

Split Housings (Pie-Shaped housings also available)

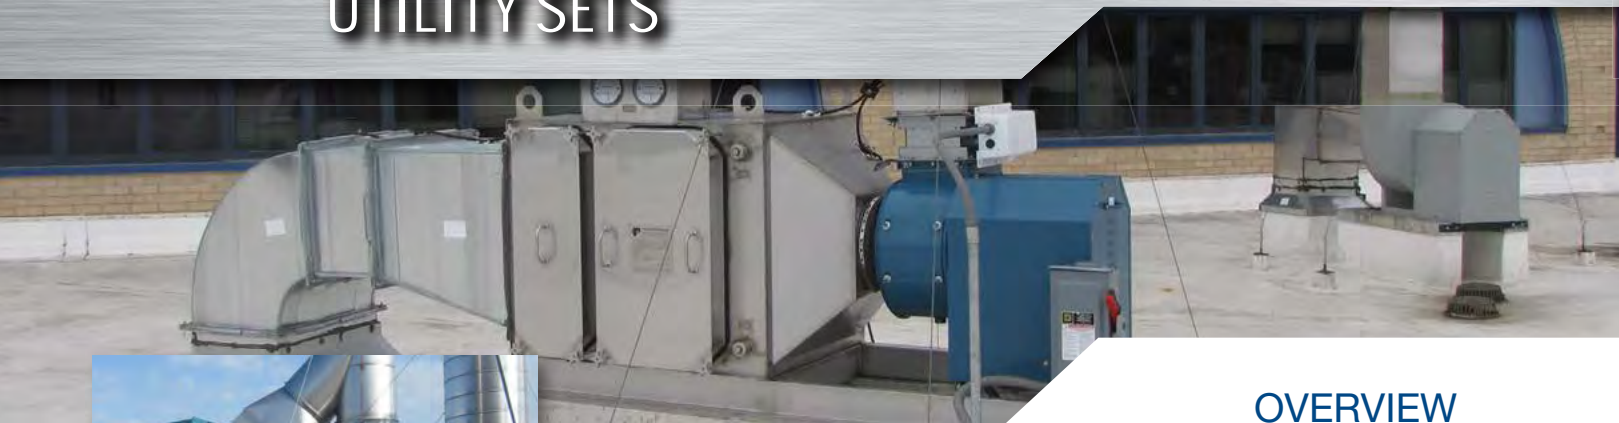

OVERVIEW

UTILITY SETS

Utility sets are an excellent choice for general exhaust and supply requirements of commercial and light industrial applications. They are suitable for indoor usage, and outdoor usage with the addition of a weather cover to enclose the motor and drives. Fan housings are continuously welded and are constructed of heavy gauge steel, aluminum, or stainless steel. TCF also offers a full line of Junior Utility Sets that are designed to provide optimal performance with minimal physical dimensions.

WHEEL TYPES

Flat-Bladed Backward Inclined, Airfoil, Forward Curved

TYPICAL INDUSTRIES

Aerospace, Asphalt, Agriculture, Air Pollution Control, Automotive, Boilers, Brick, Car Wash, Cement, Chemical, Clean Rooms, Coal, Commercial Plan & Spec, Composting, Ethanol, Food & Beverage, Foundry, General Manufacturing, Glass, Green/LEED, HVAC, Industrial Processes, Institutional & Hospitality, Marine, Metal & Minerals, Microchip, Mining, Nuclear, OEM, Petrochemical, Pharmaceutical, Power Generation, Pulp & Paper, Recycling, Textile, Transportation, Water Treatment, Wind Tunnels

COMMON ACCESSORIES

Access Door, Drain, Flanged Inlet/Outlet, Companion Flanges, Inlet/Outlet Screens, Belt Guard, Weather Cover, Shaft Seal, Shaft Cooler, Lube Lines, Piezometer Ring, Inlet Box, Two Groove Drive Minimum, Inlet & Outlet Dampers, External or Nested Inlet Vanes, Vibration Isolators, Disconnect Switches, Special Coatings

OPTIONAL CONSTRUCTION

High Temperature, Special Materials, Spark Resistant, UL 705, UL 762, UL Smoke & Heat

CERTIFICATIONS

AMCA Sound/Air and FEG, UL 705 Listed for Electrical, UL 762 Listed for Grease Laden Air, UL Listed for Smoke Control Systems



Model BCV
Process Exhaust



Model BCJ
Fume Exhaust



Model BCV
Exhaust




BCV
Building Exhaust

BCV

FLAT-BLADED BACKWARD INCLINED UTILITY SETS

- > 12.25 to 36.5 inches (315 mm to 930 mm) wheel diameters
- > Airflow to 29,100 CFM (49,400 m³/hour)
- > Static pressure to 8 inches w.g. (1,990 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > **Typical Applications:** Data Center Exhaust, General HVAC, Elevator Shaft Exhaust/Pressurization, Restroom Exhaust, Stairwell Pressurization, Industrial Ovens, Vehicle Exhaust Generator Room Ventilation, Swimming Pool Exhaust



Available For
Quickship



CATALOG 600

BCVU2

FLAT-BLADED BACKWARD INCLINED UTILITY SETS

UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR

- > 12.25 to 36.5 inches (315 mm to 930 mm) wheel diameters
- > Airflow to 29,100 CFM (49,400 m³/hour)
- > Static pressure to 8 inches w.g. (1,990 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 762 listed for Grease Laden Air
- > **Typical Applications:** Kitchen Exhaust, Dishwasher Exhaust



Available For
Quickship




CATALOG 600

BCVU5


FLAT-BLADED BACKWARD INCLINED UTILITY SETS

UL 705 LISTED

- > 12.25 to 36.5 inches (315 mm to 930 mm) wheel diameters
- > Airflow to 29,100 CFM (49,400 m³/hour)
- > Static pressure to 8 inches w.g. (1,990 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, Elevator Shaft Exhaust/Pressurization, Swimming Pool Exhaust, Generator Room Ventilation, Stairwell Pressurization, Restroom Exhaust



Available For
Quickship



CATALOG 600

BCVSH

BACKWARD INCLINED UTILITY SETS

UL LISTED FOR SMOKE CONTROL SYSTEMS


- > 12.25 to 36.5 inches (315 mm to 930 mm) wheel diameters
- > Airflow to 29,100 CFM (49,400 m³/hour)
- > Static pressure to 8 inches w.g. (1,990 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL listed for Smoke Control Systems
- > **Typical Applications:** Elevator Shaft Exhaust/Pressurization, Emergency Smoke Exhaust, Stairwell Pressurization



Available For
Quickship



CATALOG 600

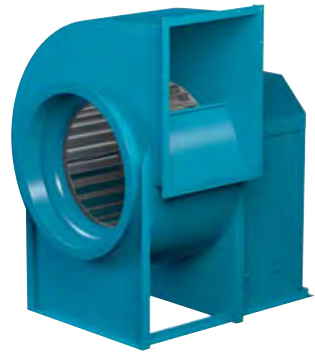

FCV
FORWARD CURVED UTILITY SETS

- > 12.25 to 36.5 inches (315 mm to 930 mm) wheel diameters
- > Airflow to 29,100 CFM (49,400 m³/hour)
- > Static pressure to 8 inches w.g. (1,990 Pa)
- > AMCA licensed for Air and Fan Efficiency Grade
- > **Typical Applications:** Data Center Exhaust, Elevator Shaft Exhaust/Pressurization, General HVAC, Restroom Exhaust, Generator Room Ventilation, Stairwell Pressurization, Swimming Pool Exhaust



CATALOG 600



BAV
AIRFOIL UTILITY SET

- > 12.25 to 36.5 inches (315 mm to 930 mm) wheel diameters
- > Airflow to 32,100 CFM (54,500 m³/hour)
- > Static pressure to 8 inches w.g. (1,990 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > **Typical Applications:** Data Center Exhaust, General HVAC, Elevator Shaft Exhaust/Pressurization, Swimming Pool Exhaust, Restroom Exhaust, Generator Room Ventilation, Stairwell Pressurization



CATALOG 600




FCJ
FORWARD CURVED JUNIOR UTILITY SETS

- > 7.5 to 10.5 inches (190 mm to 270 mm) wheel diameters
- > Airflow to 1,480 CFM (2,500 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > **Typical Applications:** Data Center Exhaust, Elevator Shaft Exhaust/Pressurization, General HVAC, Generator Room Ventilation, Restroom Exhaust, Stairwell Pressurization, Swimming Pool Exhaust



CATALOG 551



DDF
FORWARD CURVED JUNIOR UTILITY SETS, DIRECT DRIVE

- > 6 to 10.5 inches (155 mm to 270 mm) wheel diameters
- > Airflow to 2,100 CFM (3,600 m³/hour)
- > Static pressure to 1.75 inches w.g. (440 Pa)
- > **Typical Applications:** Data Center Exhaust, General HVAC, Elevator Shaft Exhaust/Pressurization, Restroom Exhaust, Generator Room Ventilation, Stairwell Pressurization, Swimming Pool Exhaust



CATALOG 551

BCJ
FLAT-BLADED BACKWARD INCLINED JUNIOR UTILITY SETS


- > 9 to 10.5 inches (230 mm to 270 mm) wheel diameters
- > Airflow to 1,900 CFM (3,200 m³/hour)
- > Static pressure to 5 inches w.g. (1,240 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > **Typical Applications:** Data Center Exhaust, General HVAC, Elevator Shaft Exhaust/Pressurization, Restroom Exhaust, Generator Room Ventilation, Stairwell Pressurization, Swimming Pool Exhaust



CATALOG 551

BCJU2
FLAT-BLADED BACKWARD INCLINED JUNIOR UTILITY SETS
UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR

- > 9 to 10.5 inches (230 mm to 270 mm) wheel diameters
- > Airflow to 1,900 CFM (3,200 m³/hour)
- > Static pressure to 5 inches w.g. (1,240 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 762 listed for Grease Laden Air
- > **Typical Applications:** Kitchen Exhaust, Dishwasher Exhaust



CATALOG 551

BCJU5
FLAT-BLADED BACKWARD INCLINED JUNIOR UTILITY SETS
UL 705 LISTED

- > 9 to 10.5 inches (230 mm to 270 mm) wheel diameters
- > Airflow to 1,900 CFM (3,200 m³/hour)
- > Static pressure to 5 inches w.g. (1,240 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, Elevator Shaft Exhaust/Pressurization, Restroom Exhaust, Generator Room Ventilation, Stairwell Pressurization, Swimming Pool Exhaust



CATALOG 551





OVERVIEW

INLINE CENTRIFUGAL & MIXED FLOW FANS

Inline centrifugal and mixed flow fans are designed for general HVAC and industrial applications where large volumes of clean air are required at low to moderate pressures. Inline centrifugal and mixed flow fans provide the performance of a centrifugal fan with the space saving advantages of an axial-type fan. With a variety of designs to choose from, these fans offer the flexibility to meet the performance and application requirements at very high efficiencies.

WHEEL TYPES

Backward Inclined, Backward Inclined Airfoil, Single Surface Mixed Flow, and true Airfoil (double surface – hollow) Mixed Flow

TYPICAL INDUSTRIES

General HVAC (exhaust, filtration, return and supply, air of commercial buildings), Air Pollution Control, Automotive, Chemical, Fertilizer, Food & Beverage, Laboratory Exhaust, Metal & Mineral Processing, and Water & Wastewater Treatment

COMMON ACCESSORIES

Access Doors, Belt Guards, Belt Tube, Companion Flanges, Disconnect Switches, Inlet/Outlet Screens, Inlet Vanes, Piezometer Ring Airflow Measurement System, Pressure Transducers, Special Coatings, Vibration Isolation and Weather Covers

OPTIONAL CONSTRUCTION

Spark Resistant Construction (Type A, B, and C), Easy Access Construction

CERTIFICATIONS

AMCA Sound/Air and FEG, UL 705 Listed for Electrical, UL 762 Listed for Grease Laden Air, UL Listed for Smoke Control Systems, OSHPD Seismic Preapproval per OSP-0271-10



Model QSL
General HVAC



Model DSI
Data Center Exhaust



Model QSL
Spray Paint Booth Exhaust



DSI

SQUARE INLINE CENTRIFUGAL FANS, DIRECT DRIVE

- > 10.5 to 18.25 inches (270 mm to 465 mm) wheel diameters
- > Airflow to 5,800 CFM (9,900 m³/hour)
- > Static pressure to 2 inches w.g. (500 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, Generator Room Ventilation, Odor Control, Restroom Exhaust



Available With
EC Motor



Available For
Quickship



CATALOG 4205



BSI

SQUARE INLINE CENTRIFUGAL FANS, BELT DRIVEN

- > 10.5 to 44.5 inches (270 mm to 1,130 mm) wheel diameters
- > Airflow to 27,400 CFM (47,000 m³/hour)
- > Static pressure to 3.5 inches w.g. (870 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, Generator Room Ventilation, Odor Control, Restroom Exhaust



Available For
Quickship



CATALOG 4205



TCLB

TUBULAR INLINE CENTRIFUGAL FANS, BELT DRIVEN

- > 10.5 to 49 inches (270 mm to 1,245 mm) wheel diameters
- > Airflow to 41,700 CFM (70,800 m³/hour)
- > Static pressure to 4 inches w.g. (990 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, Generator Room Ventilation, Odor Control, Waste Water Treatment



Available For
Quickship



CATALOG 4215



TCLBR

TUBULAR INLINE RESTAURANT CENTRIFUGAL FANS
UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR

- > 10.5 to 49 inches (270 mm to 1,245 mm) wheel diameters
- > Airflow to 41,700 CFM (70,800 m³/hour)
- > Static pressure to 4 inches w.g. (990 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 762 listed for Grease Laden Air
- > **Typical Applications:** Kitchen Exhaust, Dishwasher Exhaust



Available For
Quickship



CATALOG 4215





TSL

TUBULAR INLINE CENTRIFUGAL FANS

- > 12.25 to 89 inches (315 mm to 2,260 mm) wheel diameters
- > Airflow to 221,700 CFM (376,700 m³/hour)
- > Static pressure to 9 inches w.g. (2,240 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, Generator Room Ventilation, Odor Control, Waste Water Treatment

CATALOG 1001

QSL

QUIET MIXED FLOW FANS

- > 18.25 to 89 inches (465 mm to 2,260 mm) wheel diameters
- > Airflow to 160,000 CFM (271,800 m³/hour)
- > Static pressure to 8 inches w.g. (1,990 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** Air Handling Units, Data Center Exhaust, General HVAC, Generator Room Ventilation, Paint Booth Exhaust



CATALOG 1060



QCLB

LOW PRESSURE MIXED FLOW FANS

- > 12.25 to 73 inches (315 mm to 1,855 mm) wheel diameters
- > Airflow to 105,000 CFM (178,400 m³/hour)
- > Static pressure to 4.5 inches w.g. (1,120 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, Generator Room Ventilation

CATALOG 1070

QSLR

QUIET MIXED FLOW RESTAURANT FANS

UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR

- > 18.25 to 89 inches (465 mm to 2,260 mm) wheel diameters
- > Airflow to 160,000 CFM (271,800 m³/hour)
- > Static pressure to 8 inches w.g. (1,990 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 762 listed for Grease Laden Air
- > **Typical Applications:** Kitchen Exhaust



CATALOG 1060



QCLBR

LOW PRESSURE RESTAURANT MIXED FLOW FANS

UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR

- > 12.25 to 73 inches (315 mm to 1,855 mm) wheel diameters
- > Airflow to 105,000 CFM (178,400 m³/hour)
- > Static pressure to 4.5 inches w.g. (1,120 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 762 listed for Grease Laden Air
- > **Typical Applications:** Kitchen Exhaust, Dishwasher Exhaust

CATALOG 1070

QSLSH

QUIET MIXED FLOW SMOKE & HEAT REMOVAL FANS

UL LISTED FOR SMOKE CONTROL SYSTEMS

- > 18.25 to 89 inches (465 mm to 2,260 mm) wheel diameters
- > Airflow to 160,000 CFM (271,800 m³/hour)
- > Static pressure to 8 inches w.g. (1,990 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL listed for Smoke Control Systems
- > **Typical Applications:** Elevator Shaft Exhaust/Pressurization, Emergency Smoke Exhaust, Stairwell Pressurization



CATALOG 1060



QCLBSH

LOW PRESSURE SMOKE & HEAT MIXED FLOW FANS

UL LISTED FOR SMOKE CONTROL SYSTEMS

- > 12.25 to 73 inches (315 mm to 1,855 mm) wheel diameters
- > Airflow to 105,000 CFM (178,400 m³/hour)
- > Static pressure to 4.5 inches w.g. (1,120 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL listed for Smoke Control Systems
- > **Typical Applications:** Elevator Shaft Exhaust/Pressurization, Emergency Smoke Exhaust, Stairwell Pressurization

CATALOG 1070

ILCF

FIBERGLASS INLINE CENTRIFUGAL FAN

- > 12.4 to 39.4 inches (315 mm to 1,000 mm) wheel diameters
- > Airflow to 35,900 CFM (61,000 m³/hour)
- > Static pressure to 7 inches w.g. (1,740 Pa)
- > **Typical Applications:** Chemical/Corrosive Environments, Exhaust Applications, Water Treatment, Air Pollution Control, Process Air, High Moisture Environments



CATALOG 430



OVERVIEW

PLENUM FANS

Plenum Fans are designed for general HVAC applications where large volumes of clean air are required at low to moderate pressures. Backward inclined airfoil wheels provide high efficiency, performance and sound characteristics needed for the most stringent HVAC applications. Housed or open designs as well as belt or direct drive, plenum fans provide the flexibility to match the performance and application at the highest efficiency.

APPLICATIONS

Air-Conditioning/Heating Units, Air-Make-Up Units, Clean-Room Filtration Systems, Supply Air Systems

WHEEL TYPES

Backward inclined airfoil (9-blade or 12-blade)

TYPICAL INDUSTRIES

General HVAC (exhaust, filtration, return and supply, air of commercial buildings and air handling units)

COMMON ACCESSORIES


Inlet/Outlet Screen, Piezometer Ring Airflow Measurement System, Pressure Transducers, Protective Enclosure, Special Coatings and Vibration Isolation, Aero Acoustic Diffuser™

OPTIONAL CONSTRUCTION

Special Wheel Width

CERTIFICATIONS

AMCA Sound/Air and FEG

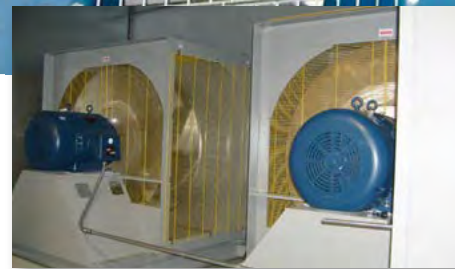

Model EPFN
Air Handling Unit



Model MPQN
Air Handling Unit



Model EPF
Air Handling Unit




Model MPQN
Air Handling Unit

EPF

PLENUM FAN, AIRFOIL WHEEL, 9-BLADES, ARRANGEMENT 3

- > 12.4 to 73 inches (315 mm to 1,855 mm) wheel diameters
- > Airflow to 185,200 CFM (314,700 m³/hour)
- > Static pressure to 10 inches w.g. (2,490 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade




CATALOG 470

EPFN

PLENUM FAN, AIRFOIL WHEEL, 9-BLADES, ARRANGEMENT 1 & 4

- > 12.4 to 73 inches (315 mm to 1,855 mm) wheel diameters
- > Airflow to 185,200 CFM (314,700 m³/hour)
- > Static pressure to 10 inches w.g. (2,490 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade




CATALOG 470

EPQ

PLENUM FAN, AIRFOIL WHEEL, 12-BLADES, ARRANGEMENT 3

- > 12.4 to 73 inches (315 mm to 1,855 mm) wheel diameters
- > Airflow to 185,200 CFM (314,700 m³/hour)
- > Static pressure to 12 inches w.g. (2,980 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade




CATALOG 470


EPQN

PLENUM FAN, AIRFOIL WHEEL, 12-BLADES, ARRANGEMENT 1 & 4

- > 12.4 to 73 inches (315 mm to 1,855 mm) wheel diameters
- > Airflow to 185,200 CFM (314,700 m³/hour)
- > Static pressure to 12 inches w.g. (2,980 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade



CATALOG 470

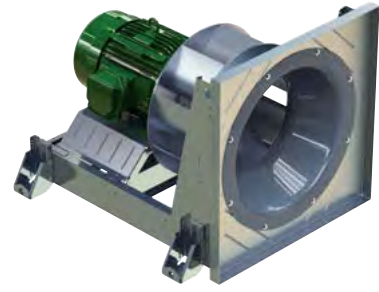


EPLFN

PLENUM FAN, COMMERCIAL DUTY, AIRFOIL WHEEL, 9-BLADED

- > 12.4 to 49 inches (315 mm to 1,245 mm) wheel diameters
- > Airflow to 68,000 CFM (115,500 m³/hour)
- > Static pressure to 8.5 inches w.g. (2,110 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade

CATALOG 455

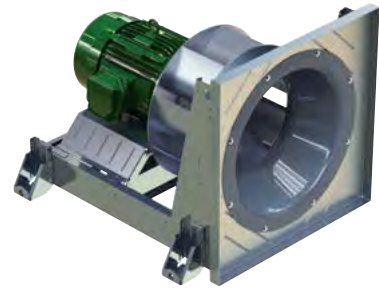


EPLQN

PLENUM FAN, COMMERCIAL DUTY, AIRFOIL WHEEL, 12-BLADED

- > 12.4 to 49 inches (315 mm to 1,245 mm) wheel diameters
- > Airflow to 68,000 CFM (115,500 m³/hour)
- > Static pressure to 8.5 inches w.g. (2,110 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade

CATALOG 455




MPQN

MODULAR INSULATED PLENUM FAN, AIRFOIL WHEEL, 12-BLADED, ARRANGEMENT 4

- > 12.4 to 49 inches (315 mm to 1,245 mm) wheel diameters
- > Airflow to 76,000 CFM (129,100 m³/hour)
- > Static pressure to 12 inches w.g. (2,980 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade

CATALOG 490




MPQS

MODULAR PLENUM FAN, AIRFOIL WHEEL, 12-BLADED, ARRANGEMENT 4

- > 12.4 to 49 inches (315 mm to 1,245 mm) wheel diameters
- > Airflow to 76,000 CFM (129,100 m³/hour)
- > Static pressure to 12 inches w.g. (2,980 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade

CATALOG 490

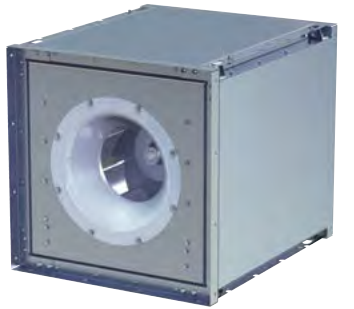


MPLFS

MODULAR PLENUM FAN, AIRFOIL WHEEL 9-BLADED, ARRANGEMENT 4

- > 12.25 to 36.5 inches (315 mm to 930 mm) wheel diameters
- > Airflow to 44,000 CFM (74,800 m³/hour)
- > Static pressure to 12 inches w.g. (2,980 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade

CATALOG 495

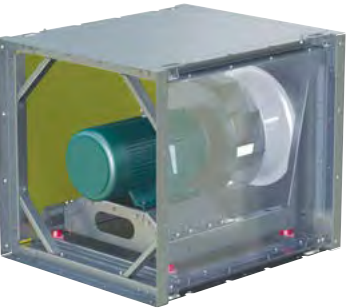


MPLFN

MODULAR INSULATED PLENUM FAN, AIRFOIL WHEEL 9-BLADED, ARRANGEMENT 4

- > 12.25 to 36.5 inches (315 mm to 930 mm) wheel diameters
- > Airflow to 44,000 CFM (74,800 m³/hour)
- > Static pressure to 12 inches w.g. (2,980 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade

CATALOG 495

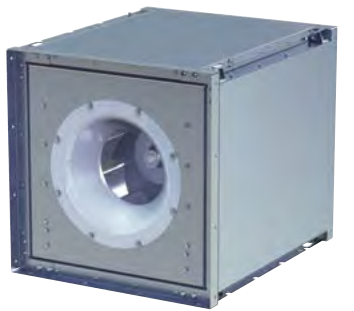


MPLQS

MODULAR PLENUM FAN, AIRFOIL WHEEL 12-BLADED, ARRANGEMENT 4

- > 12.25 to 36.5 inches (315 mm to 930 mm) wheel diameters
- > Airflow to 44,000 CFM (74,800 m³/hour)
- > Static pressure to 12 inches w.g. (2,980 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade

CATALOG 495

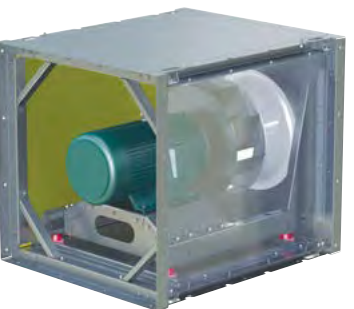

MPLQN

MODULAR INSULATED PLENUM FAN, AIRFOIL WHEEL 12-BLADED, ARRANGEMENT 4

- > 12.25 to 36.5 inches (315 mm to 930 mm) wheel diameters
- > Airflow to 44,000 CFM (74,800 m³/hour)
- > Static pressure to 12 inches w.g. (2,980 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade

CATALOG 495





OVERVIEW



Model BCPL
Baking Oven



Model BEPL
Baking Oven



Model BFPL
Baking Oven

PLUG FANS

Plug fans offer great versatility for complex system configurations. Equipped with a gusseted mounting panel, they are mounted directly to the plenum wall separating the motor and drive components from the process air. Plug fans provide high efficiency recirculation air with the benefit of easy installation and removal.

APPLICATIONS

Air Curtains, Dyers, Freezers, High Temperature, Kilns, Ovens, Process Applications, Product Cooling, Re-Circulation, Air Heaters, Ceiling, Wall and Floor Panel Plenums, Degreasers, Dryers, Dust Collectors, Evaporators, Packaged Air Handlers, Parts Washers, Penthouses, Smoke Houses, Space Heaters, Spray Booths, and other High Temperature Applications

WHEEL TYPES

Flat-Bladed Backward Inclined and Backward Curved

TYPICAL INDUSTRIES

Automotive, Industrial Cooling and Ovens

COMMON ACCESSORIES

Belt Guards, Bearing Guards, Extended Lube Lines, Forklift Lifting Tubes, Integral Inlet Cone, Insulated plug, Piezometer Ring Airflow Measurement System, Shaft Cooler (Slinger), Variable Inlet Vanes, Housings

OPTIONAL CONSTRUCTION


ATEX Construction, High-Temperature Construction to 1000 °F, Pedestal Design for Floor Mounting, Spark Resistant Construction (Type A, B, and C), Special Materials (stainless steel, normalized steel), Special Wheel Width & Diameter



BEPL

HIGH EFFICIENCY PLUG FAN, BACKWARD CURVED

- > 12.4 to 49 inches (315 mm to 1,245 mm) wheel diameters
- > Airflow to 76,000 CFM (129,100 m³/hour)
- > Static pressure to 12 inches w.g. (2,980 Pa)
- > Airstream temperatures to 1,000°F (538°C)

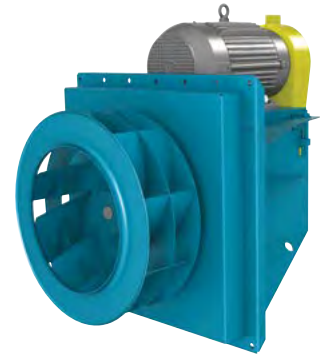

CATALOG 355

BFPL

HIGH EFFICIENCY PLUG FAN, BACKWARD CURVED

- > 12.4 to 49.21 inches (315 mm to 1,250 mm) wheel diameters
- > Airflow to 76,000 CFM (129,100 m³/hour)
- > Static pressure to 12 inches w.g. (2,980 Pa)
- > Airstream temperatures to 1,000°F (538°C)



CATALOG 360

BCPL

PLUG FAN, BC BACKWARD INCLINED WHEEL
NON HVAC APPLICATIONS

- > 12.25 to 49 inches (315 mm to 1,245 mm) wheel diameters
- > Airflow to 57,900 CFM (98,400 m³/hour)
- > Static pressure to 8 inches w.g. (1,990 Pa)
- > Airstream temperatures to 1,000°F (538°C)



CATALOG 350



CENTRIFUGAL ROOF & WALL EXHAUSTERS



OVERVIEW

CENTRIFUGAL ROOF & WALL EXHAUSTERS

Centrifugal Roof and Wall Exhausters are available in direct and belt driven models, featuring backward inclined, non-overloading centrifugal wheels for maximum efficiency and quiet operation. A variety of configurations are available for the exhaust of relatively clean air and grease-laden air.

TYPICAL INDUSTRIES

Agriculture, Air Pollution Control, Automotive, Boilers, Brick, Car Wash, Commercial Plan & Spec, Composting, Ethanol, Food & Beverage, Foundry, General Manufacturing, Glass, Green/LEED, HVAC, Institutional & Hospitality, Metal & Minerals, Microchip, Mining, Nuclear, OEM, Petrochemical, Pharmaceutical, Power Generation, Pulp & Paper, Recycling, Textile, Transportation

COMMON ACCESSORIES

Backdraft Dampers, Roof Curbs, Birdscreens, Insect Screens, Curb Hinges, Retaining Chains, Security Hasps, Metal Nameplates, Stainless Steel Shafts, Automatic Belt Tensioners, AMCA Spark B Construction, Stainless Steel Hardware, Tie Downs, Speed Controllers, 2-Speed Switches, Firestats, Disconnect Switches, Special Coatings

CERTIFICATIONS

AMCA Sound/Air and FEG, UL 705 Listed for Electrical, UL 762 Listed for Grease Laden Air, UL Listed for Smoke Control Systems, OSHPD Seismic Preapproval per OSP-0395-10, Miami-Dade County Hurricane Rating per NOA No. 12-0914.12



Model BCRW
Office Building Exhaust



Model BCRUSH
Emergency Smoke Exhaust



Model DCRD
School - General Building Exhaust



Model BCRU
Retail Store - General Building Exhaust

DCRD

CENTRIFUGAL ROOF EXHAUSTER, DOWNBLAST, DIRECT DRIVE

- > 8 to 19.25 inches (205 mm to 490 mm) wheel diameters
- > Airflow to 5,020 CFM (8,500 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > AMCA licensed for Sound and Air
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Generator Room Ventilation, Jet Bridge Exhaust, Restroom Exhaust




Available With
EC Motor



Available For
Quickship



CATALOG 4050



BCRD

CENTRIFUGAL ROOF EXHAUSTER, DOWNBLAST, BELT DRIVEN


- > 8.5 to 49.21 inches (215 mm to 1,250 mm) wheel diameters
- > Airflow to 28,700 CFM (48,800 m³/hour)
- > Static pressure to 3.25 inches w.g. (810 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Generator Room Ventilation, Jet Bridge Exhaust, Restroom Exhaust



Available For
Quickship



CATALOG 4050



BCRD-E

ENDUREX™ POLYMERIC HOUSING CENTRIFUGAL ROOF EXHAUSTER, DOWNBLAST, BELT DRIVEN

- > 8.5 to 27.95 inches (215 mm to 710 mm) wheel diameters
- > Airflow to 8,700 CFM (14,800 m³/hour)
- > Static pressure to 3.25 inches w.g. (810 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Generator Room Ventilation, Jet Bridge Exhaust, Restroom Exhaust



Available For
Quickship



CATALOG 4050



DCRU

CENTRIFUGAL ROOF EXHAUSTER, UPBLAST, DIRECT DRIVE

- > 8.38 to 18.25 inches (215 mm to 465 mm) wheel diameters
- > Airflow to 3,865 CFM (6,600 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** General HVAC, General Rooftop Exhaust, Generator Room Ventilation, Jet Bridge Exhaust, Restroom Exhaust



Available With
EC Motor



Available For
Quickship



CATALOG 4105





Available With EC Motor



Available For Quickship



DCRUR

CENTRIFUGAL KITCHEN ROOF EXHAUSTER, UPBLAST, DIRECT DRIVE
UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR

- > 8.38 to 18.25 inches (215 mm to 465 mm) wheel diameters
- > Airflow to 3,865 CFM (6,600 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 762 listed for Grease Laden Air
- > **Typical Applications:** Kitchen Exhaust, Dishwasher Exhaust

CATALOG 4105



Available For Quickship



BCRU

CENTRIFUGAL ROOF EXHAUSTER, UPBLAST, BELT DRIVEN

- > 12.25 to 49.21 inches (315 mm to 1,250 mm) wheel diameters
- > Airflow to 29,100 CFM (49,400 m³/hour)
- > Static pressure to 3.25 inches w.g. (810 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** General HVAC, General Rooftop Exhaust, Generator Room Ventilation, Jet Bridge Exhaust, Restroom Exhaust

CATALOG 4105



Available For Quickship



BCRUR

CENTRIFUGAL KITCHEN ROOF EXHAUSTER, UPBLAST, BELT DRIVEN
UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR

- > 12.25 to 39.37 inches (315 mm to 1,000 mm) wheel diameters
- > Airflow to 20,700 CFM (35,200 m³/hour)
- > Static pressure to 3.25 inches w.g. (810 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 762 listed for Grease Laden Air
- > **Typical Applications:** Kitchen Exhaust, Dishwasher Exhaust

CATALOG 4105



Available For Quickship



BCRUSH

CENTRIFUGAL ROOF EXHAUSTER, UPBLAST, BELT DRIVEN
UL LISTED FOR SMOKE CONTROL SYSTEMS

- > 12.25 to 49.21 inches (315 mm to 1,250 mm) wheel diameters
- > Airflow to 29,100 CFM (49,400 m³/hour)
- > Static pressure to 3.25 inches w.g. (810 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL listed for Smoke Control Systems
- > **Typical Applications:** Elevator Shaft Exhaust/Pressurization, Emergency Smoke Exhaust, Stairwell Pressurization

CATALOG 4105



Available With EC Motor



Available For Quickship



DCRW

CENTRIFUGAL WALL EXHAUSTER, DIRECT DRIVE

- > 8.38 to 18.25 inches (215 mm to 465 mm) wheel diameters
- > Airflow to 3,865 CFM (6,600 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, Generator Room Ventilation, Restroom Exhaust

CATALOG 4105



Available With EC Motor



Available For Quickship



DCRWR

CENTRIFUGAL WALL KITCHEN EXHAUSTER, DIRECT DRIVE
UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR

- > 8.38 to 18.25 inches (215 mm to 465 mm) wheel diameters
- > Airflow to 3,865 CFM (6,600 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 762 listed for Grease Laden Air
- > **Typical Applications:** Kitchen Exhaust, Dishwasher Exhaust

CATALOG 4105



Available For Quickship



BCRW

CENTRIFUGAL WALL EXHAUSTER, BELT DRIVEN

- > 12.25 to 31.5 inches (315 mm to 800 mm) wheel diameters
- > Airflow to 15,100 CFM (25,700 m³/hour)
- > Static pressure to 3.25 inches w.g. (810 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, Generator Room Ventilation, Restroom Exhaust

CATALOG 4105



Available For Quickship




BCRWR

CENTRIFUGAL WALL KITCHEN EXHAUSTER, BELT DRIVEN
UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR

- > 12.25 to 31.5 inches (315 mm to 800 mm) wheel diameters
- > Airflow to 15,100 CFM (25,700 m³/hour)
- > Static pressure to 3.25 inches w.g. (810 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 762 listed for Grease Laden Air
- > **Typical Applications:** Kitchen Exhaust, Dishwasher Exhaust

CATALOG 4105




DCLP

LOUVERED CENTRIFUGAL ROOF EXHAUSTERS, DIRECT DRIVE

- > 8 to 12.38 inches (205 mm to 315 mm) wheel diameters
- > Airflow to 2,000 CFM (3,400 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Restroom Exhaust, Generator Room Ventilation, Jet Bridge Exhaust

CATALOG 4135



BCLP

LOUVERED CENTRIFUGAL ROOF EXHAUSTERS, BELT DRIVEN

- > 8.5 to 55.12 inches (215 mm to 1,400 mm) wheel diameters
- > Airflow to 36,000 CFM (61,200 m³/hour)
- > Static pressure to 3.25 inches w.g. (810 Pa)
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Restroom Exhaust, Generator Room Ventilation, Jet Bridge Exhaust

CATALOG 4135



DCLH

HOODED CENTRIFUGAL ROOF EXHAUSTERS, DIRECT DRIVE

- > 8 to 12.38 inches (205 mm to 315 mm) wheel diameters
- > Airflow to 2,000 CFM (3,400 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Restroom Exhaust, Generator Room Ventilation, Jet Bridge Exhaust

CATALOG 4135



BCLH

HOODED CENTRIFUGAL ROOF EXHAUSTERS, BELT DRIVEN

- > 8.5 to 55.12 inches (215 mm to 1,400 mm) wheel diameters
- > Airflow to 36,000 CFM (61,200 m³/hour)
- > Static pressure to 3.25 inches w.g. (810 Pa)
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Restroom Exhaust, Generator Room Ventilation, Jet Bridge Exhaust

CATALOG 4135

BHRE

HINGED RESTAURANT EXHAUST FAN, BELT DRIVEN
UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR

- > 10.5 to 24.5 inches (270 mm to 625 mm) wheel diameters
- > Airflow to 9,000 CFM (15,300 m³/hour)
- > Static pressure to 5 inches w.g. (1,240 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 and 762 listing available
- > **Typical Applications:** Kitchen Exhaust, Dishwasher Exhaust



CATALOG 610

CANTED ROOF CURBS

PREFABRICATED ROOF CURBS

- > Constructed of 18-gauge galvanized steel with continuous welded seams
- > Large 3" built-in 45° cant to accommodate roofing material to top of curb. Cant is beveled at corners for better support of roofing material
- > Wood nailer (1½") secured to top ledge
- > Lined with 1½" fiberglass fire-resistant, sound-absorbing insulation
- > Damper shelf
- > **Options:** Aluminum (16-gauge) construction, Burglar security bars, Metal liner (galvanized or aluminum), Special heights up to 24", Single or double pitched curbs for sloping roofs



CATALOG 4910

SELF FLASHING ROOF CURBS

PREFABRICATED ROOF CURBS

- > Constructed of 18-gauge galvanized steel with continuous welded seams
- > Wide base plate (flashing) to insure watertight bond to roof
- > Top ledge covered with 3/16" polystyrene gasket for weather seal and to reduce metal-to-metal conducted noise
- > Lined with 1½" fiberglass fire-resistant, sound-absorbing insulation
- > Damper shelf
- > **Options:** Aluminum (16-gauge) construction, Burglar security bars, Metal liner (galvanized or aluminum), Special heights up to 24", Wood nailer (1½") secured to top ledge in lieu of polystyrene gasket, Single or double pitched curbs for sloping roofs




CATALOG 4910

CURB ADAPTERS

PREFABRICATED ROOF CURBS

- > Constructed of heavy-gauge galvanized steel with continuous welded seams
- > Top ledge covered with 3/16" polystyrene gasket to reduce metal-to-metal conducted noise and act as a weather seal

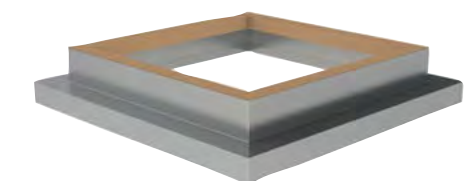

CATALOG 4910


CENTRIFUGAL FILTERED SUPPLY FANS

Filtered Supply Fans are belt driven centrifugal fans that are designed to provide filtered outside air to buildings such as manufacturing plants, warehouses, and auditoriums. Fresh make-up air is supplied to replace the air lost through industrial processes, fume hood exhaust, or general building ventilation.



CEILING & CABINET VENTILATORS

Ceiling and Cabinet Ventilators are designed for commercial applications requiring quiet, continuous, and reliable operation, including bathrooms, generator rooms, data centers and general HVAC exhaust. These ventilators offer a variety of mounting configurations.

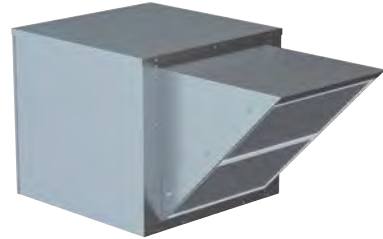

BCRFS

CENTRIFUGAL ROOFTOP FILTERED SUPPLY FAN, BELT DRIVEN

- > 8.86 to 22.05 inches (225 mm to 560 mm) wheel diameters
- > Airflow to 17,000 CFM (28,900 m³/hour)
- > Static pressure to 4 inches w.g. (1,000 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** General HVAC Supply, Auditorium Supply, Industrial Supply, Kitchen Supply

CATALOG 4310



LPSF

LOUVERED PENTHOUSE SUPPLY FAN, BELT DRIVEN

- > 12.4 to 35.6 inches (315 mm to 905 mm) wheel diameters
- > Airflow to 47,000 CFM (79,900 m³/hour)
- > Static pressure to 5.5 inches w.g. (1,370 Pa)
- > **Typical Applications:** General HVAC Supply, Auditorium Supply, Industrial Supply

CATALOG 2010

CANTED ROOF CURBS

PREFABRICATED ROOF CURBS

- > Constructed of 18-gauge galvanized steel with continuous welded seams
- > Large 3" built-in 45° cant to accommodate roofing material to top of curb. Cant is beveled at corners for better support of roofing material
- > Wood nailer (1½") secured to top ledge
- > Lined with 1½" fiberglass fire-resistant, sound-absorbing insulation
- > Damper shelf



SELF FLASHING ROOF CURBS

PREFABRICATED ROOF CURBS

- > Constructed of 18-gauge galvanized steel with continuous welded seams
- > Wide base plate (flashing) to insure watertight bond to roof
- > Top ledge covered with 3/16" polystyrene gasket for weather seal and to reduce metal-to-metal conducted noise
- > Lined with 1½" fiberglass fire-resistant, sound-absorbing insulation
- > Damper shelf



CATALOG 4910

DBS

FORWARD CURVED INLINE DUCT BLOWERS

- > 8 to 20 inches (205 mm to 510 mm) wheel diameters
- > Airflow to 18,500 CFM (31,400 m³/hour)
- > Static pressure to 4 inches w.g. (990 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed



CATALOG 4220

DBT

FORWARD CURVED INLINE TWIN DUCT BLOWERS

- > 8 to 20 inches (205 mm to 510 mm) wheel diameters
- > Airflow to 31,500 CFM (53,500 m³/hour)
- > Static pressure to 3 inches w.g. (750 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed



CATALOG 4220

T

CEILING VENTILATOR

- > 12 fan sizes available in horizontal and vertical discharge
- > Airflow to 1,590 CFM (2,700 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > AMCA licensed for Sound and Air
- > UL 507 listed



CATALOG 4600

TL

INLINE/CABINET VENTILATOR

- > 12 fan sizes available in straight through and right angle discharge
- > Airflow to 3,868 CFM (6,600 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > AMCA licensed for Sound and Air
- > UL 507 listed



CATALOG 4600

GRAVITY VENTILATORS

Gravity, or natural, ventilation is a means of ventilating a building by strategically placing openings in the building exterior in order to take advantage of naturally occurring phenomena. With a wide range of designs and styles, Twin City Fan can supply the right gravity ventilator whether it is selected based on performance, size, aesthetic appeal, weather resistance, construction, climate or cost. Gravity ventilators are designed to provide relief (exhaust) and intake (supply) airflow for a number of commercial and light industrial applications.



GRV

SPUN ALUMINUM GRAVITY RELIEF & INTAKE VENTILATORS

- > 9 to 48.3 inches (230 mm to 1,230 mm) round throat sizes
- > Airflow to 25,100 CFM (42,600 m³/hour)
- > Static pressure to 0.375 inches w.g. (90 Pa)



CATALOG 4720




MGR / MGI

MODULAR HOODED GRAVITY RELIEF & INTAKE VENTILATORS

- > 8 to 180 inches (205 mm to 4,575 mm) throat sizes
- > **MGR:** Airflow to 109,000 CFM (185,200 m³/hour)
- > **MGR:** Static pressure to 0.3 inches w.g. (80 Pa)
- > **MGI:** Airflow to 91,200 CFM (154,900 m³/hour)
- > **MGI:** Static pressure to 0.4 inches w.g. (100 Pa)

CATALOG 4720



LUG

LOW PROFILE UPBLAST GRAVITY RELIEF VENTILATORS

- > 14 to 60 inches (355 mm to 1,525 mm) wheel diameters
- > Airflow to 90,000 CFM (152,900 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)

CATALOG 4720



TIL / TEL

LOUVERED PENTHOUSE GRAVITY RELIEF & INTAKE VENTILATORS

- > 12 to 144 inches (305 mm to 3,660 mm) square throat sizes
- > 3 to 20 tiers high
- > Airflow to 85,700 CFM (145,600 m³/hour)
- > Static pressure to 0.15 inches w.g. (40 Pa)

CATALOG 4720



FR (ROUND) / MA (SQUARE)

FIBERGLASS GRAVITY RELIEF & INTAKE VENTILATORS

- > **FR:** 14 to 45.5 inches (355 mm to 1,155 mm) square throat sizes
- > **FR:** Airflow to 12,850 CFM (21,800 m³/hour)
- > **FR:** Static pressure to 0.25 inches w.g. (60 Pa)
- > **MA:** 6 to 60 inches (155 mm to 1,525 mm) square throat sizes
- > **MA:** Airflow to 40,000 CFM (68,000 m³/hour)
- > **MA:** Static pressure to 1 inch w.g. (250 Pa)

CATALOG 3000

MANCOOLERS

Mancoolers are constructed of high quality axial fans and are designed for general industrial use. The mounted units are constructed on a movable base—both the inlet and the outlet are provided with screens as standard, and are fabricated to meet OSHA safety requirements. The fan's swivel base allows for a full 360° rotation, providing airflow from any angle. The stationary units can be adjusted for airflow in any direction and are manufactured with a predrilled base plate for wall, column, ceiling or floor mounting.



TCSM

MANCOOLER, STATIONARY MOUNT

- > 16 to 48 inches (410 mm to 1,220 mm) wheel diameters
- > Airflow to 41,200 CFM (70,000 m³/hour)



CATALOG AX700

TCSMQ

MANCOOLER, STATIONARY MOUNT, 'Q' WHEEL

- > 12 to 24 inches (305 mm to 610 mm) wheel diameters
- > Airflow to 11,400 CFM (19,400 m³/hour)



FAN SELECTOR

TCPM

MANCOOLER, PORTABLE MOUNT

- > 16 to 48 inches (410 mm to 1,220 mm) wheel diameters
- > Airflow to 41,200 CFM (70,000 m³/hour)



CATALOG AX700

TCPMQ

MANCOOLER, PORTABLE MOUNT, 'Q' WHEEL

- > 12 to 24 inches (305 mm to 610 mm) wheel diameters
- > Airflow to 11,400 CFM (19,400 m³/hour)



FAN SELECTOR

PROPELLER WALL FANS



OVERVIEW

PROPELLER WALL FANS

Propeller Wall Fans are designed for cost effective, general ventilation. They are available in direct and belt driven models, with aluminum or steel propellers. Fixed or adjustable pitch models are offered to meet a variety of application requirements.

PROPELLER TYPES

Fixed Pitch Fabricated Steel & Cast Aluminum, Adjustable Pitch Cast Aluminum

TYPICAL INDUSTRIES


Agriculture, Air Pollution Control, Automotive, Boilers, Brick, Car Wash, Commercial Plan & Spec, Composting, Ethanol, Food & Beverage, Foundry, General Manufacturing, Glass, HVAC, Industrial Processes, Institutional & Hospitality, Metal & Minerals, Mining, OEM, Petrochemical, Power Generation, Pulp & Paper, Recycling, Textile, and Water Treatment.

COMMON ACCESSORIES

Wall Boxes, Wall Collars, OSHA Motor Side Guards, Filter Boxes, Weatherhoods, Backdraft Dampers, Damper Guards, Screens, Extended Lube Lines, Special Coatings, Disconnect Switches, and Single Point Wiring.

CERTIFICATIONS

AMCA Sound/Air and FEG, UL 705 Listed for Electrical

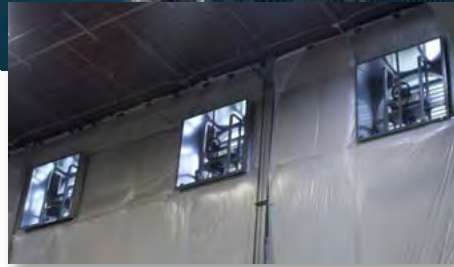

Model WPB
Warehouse Exhaust



Model WPB
Generator Room Exhaust



WPD
Warehouse Exhaust



Model TCWPX
General Exhaust




PROPELLER WALL FANS

TCWP / TCWPQ / TCWPZ / TCWPX

PROPELLER WALL FAN, FIXED & ADJUSTABLE PITCH BLADES

- > 10 to 72 inches (255 mm to 1,830 mm) wheel diameters
- > Airflow to 85,000 CFM (144,400 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > **Typical Applications:** Data Center Exhaust, General HVAC, Generator Room Ventilation, Sidewall Exhaust and Supply

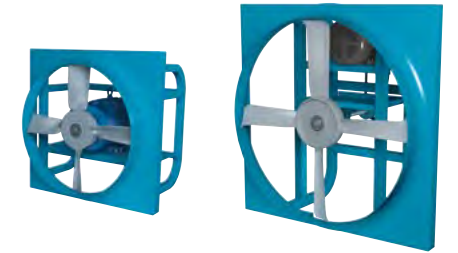

CATALOG AX500/AX510

WPD

PROPELLER WALL FAN, MEDIUM DUTY, DIRECT DRIVE

- > 14 to 48 inches (355 mm to 1,220 mm) wheel diameters
- > Airflow to 35,300 CFM (60,000 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, Generator Room Ventilation, Sidewall Exhaust and Supply



Available For
Quickship



CATALOG 4820

WPB

PROPELLER WALL FAN, LIGHT & MEDIUM DUTY, BELT DRIVEN

- > 21 to 60 inches (535 mm to 1,525 mm) wheel diameters
- > Airflow to 62,830 CFM (106,700 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, Generator Room Ventilation, Sidewall Exhaust and Supply



Available For
Quickship



CATALOG 4820

TCPE

PROPELLER WALL FAN, LIGHT DUTY, EXHAUST, DIRECT DRIVE

- > 8 to 24 inches (205 mm to 610 mm) wheel diameters
- > Airflow to 7,615 CFM (12,900 m³/hour)
- > Static pressure to 0.625 inches w.g. (160 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > **Typical Applications:** General HVAC, Generator Room Ventilation, Sidewall Exhaust and Supply



Available With
EC Motor



Available For
Quickship



CATALOG 4800

TCWPF

FIBERGLASS PANEL FAN, DIRECT DRIVE

- > 12 to 48 inches (305 mm to 1,220 mm) wheel diameters
- > Airflow to 41,900 CFM (71,200 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > **Typical Applications:** Corrosive Environments, General HVAC, Marine, Waste Water Treatment, High Moisture Environments, Swimming Pools



CATALOG 430



OVERVIEW

AXIAL FANS

Tubeaxial Fans are designed to handle a wide range of requirements, from general ventilation to process air supply. The mounting flexibility makes it an ideal choice for many industrial and commercial applications. Units are available as direct or belt driven, with steel or aluminum wheels that are fixed or adjustable blade pitch.

Vaneaxial Fans are designed for applications where large volumes of air are required at moderate to high pressures. Direct and belt driven models, with fixed and adjustable blade wheels, are available. The tubular design and high wheel efficiency provides maximum performance while using minimal space.

PROPELLER TYPES

Fixed Pitch Fabricated Steel and Cast Aluminum, Adjustable Pitch Cast Aluminum

TYPICAL INDUSTRIES

Aerospace, Agriculture, Air Pollution Control, Automotive, Boilers, Brick, Car Wash, Chemical, Clean Rooms, Composting, Ethanol, Food & Beverage, Foundry, General Manufacturing, Glass, Green/LEED, HVAC, Industrial Processes, Institutional & Hospitality, Marine, Metal & Minerals, Microchip, Mining, Nuclear, OEM, Petrochemical, Pharmaceutical, Power Generation, Pulp & Paper, Recycling, Textile, Transportation, Water Treatment, Wind Tunnels

COMMON ACCESSORIES

Access Doors, Inlet/Outlet Screens and Guards, Inlet/Outlet Companion Flanges, Belt Guards, Motor Covers, Weather Covers, Inlet Bells, Inlet/Outlet Cones, Special Coatings and Disconnect Switches

OPTIONAL CONSTRUCTION

Spark Resistant Construction (Type A, B, and C), High Temperature Construction, Reverse Flow Configuration, High Moisture Modification, Swingout and Clamshell Construction

CERTIFICATIONS

AMCA Sound/Air and FEG, UL 705 Listed for Electrical, UL Listed for Smoke Control Systems



Model TCTS
Vapor Dispersion



Model TCVX - Vertical Roof Mount
Exhaust



Model TCVA
Hospital Exhaust



Model TCVA
Paint Booth Exhaust

TD

TUBEAXIAL FAN, DIRECT DRIVE

- > 14 to 48 inches (355 mm to 1,220 mm) wheel diameters
- > Airflow to 42,900 CFM (72,900 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, Parking Garage Ventilation



Available For
Quickship



CATALOG 4830

TB

TUBEAXIAL FAN, BELT DRIVEN

- > 14 to 60 inches (355 mm to 1,525 mm) wheel diameters
- > Airflow to 82,600 CFM (140,300 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Parking Garage Ventilation



Available For
Quickship



CATALOG 4830

TBSH

TUBEAXIAL FAN, BELT DRIVEN

UL LISTED FOR SMOKE CONTROL SYSTEMS

- > 24 to 60 inches (610 mm to 1,525 mm) wheel diameters
- > Airflow to 82,600 CFM (140,300 m³/hour)
- > Static pressure to 1.25 inches w.g. (310 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL listed for Smoke Control Systems
- > **Typical Applications:** Elevator Shaft Exhaust/Pressurization, Emergency Smoke Exhaust, Stairwell Pressurization



Available For
Quickship



CATALOG 4830


ATAD

AXIPAL TUBEAXIAL FAN, DIRECT DRIVE

- > 13.65 to 48.78 inches (350 mm to 1,240 mm) wheel diameters
- > Airflow to 75,600 CFM (128,400 m³/hour)
- > Static pressure to 4.5 inches w.g. (1,120 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > **Typical Applications:** Air Pollution Control, Data Center Exhaust, General HVAC, General Rooftop Exhaust, Clean Room HEPA Filtration, Odor Control, Waste Water Treatment



Available For
Quickship



CATALOG AX210



ATAB

AXIPAL TUBEAXIAL FAN, BELT DRIVEN

- > 15.61 to 48.78 inches (400 mm to 1,240 mm) wheel diameters
- > Airflow to 65,100 CFM (110,600 m³/hour)
- > Static pressure to 2.5 inches w.g. (620 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > **Typical Applications:** Air Pollution Control, Data Center Exhaust, General HVAC, General Rooftop Exhaust, Clean Room HEPA Filtration, Odor Control, Waste Water Treatment

CATALOG AX210



TCVA

VANEAXIAL FAN, CAST ALUMINUM WHEEL

- > 12 to 60 inches (305 mm to 1,525 mm) wheel diameters
- > Airflow to 103,000 CFM (175,000 m³/hour)
- > Static pressure to 7 inches w.g. (1,740 Pa)
- > AMCA licensed for Air and Fan Efficiency Grade
- > UL 705 listing available
- > **Typical Applications:** Air Pollution Control, Odor Control, Clean Room HEPA Filtration, Parking Garage Ventilation, Waste Water Treatment



CATALOG AX100



TCTS

TUBEAXIAL FAN, STEEL WHEEL

- > 12 to 54 inches (305 mm to 1,375 mm) wheel diameters
- > Airflow to 80,000 CFM (135,900 m³/hour)
- > Static pressure to 4 inches w.g. (990 Pa)
- > UL 705 listing available
- > **Typical Applications:** Air Pollution Control, Heat Transfer Equipment Testing, Odor Control, Waste Water Treatment

CATALOG AX250



TCVX

VANEAXIAL FAN, ADJUSTABLE PITCH BLADES

- > 18 to 84 inches (460 mm to 2,135 mm) wheel diameters
- > Airflow to 233,000 CFM (395,900 m³/hour)
- > Static pressure to 10 inches w.g. (2,490 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listing available
- > **Typical Applications:** Air Pollution Control, Odor Control, Clean Room HEPA Filtration, Parking Garage Ventilation, Waste Water Treatment



CATALOG AX300



TCTSSH

TUBEAXIAL FAN, STEEL WHEEL
UL LISTED FOR SMOKE CONTROL SYSTEMS

- > 12 to 54 inches (305 mm to 1,375 mm) wheel diameters
- > Airflow to 80,000 CFM (135,900 m³/hour)
- > Static pressure to 4 inches w.g. (990 Pa)
- > UL listed for Smoke Control Systems
- > **Typical Applications:** Elevator Shaft Exhaust/Pressurization, Emergency Smoke Exhaust, Stairwell Pressurization

CATALOG AX250



TCVSSH

VANEAXIAL FAN, STEEL WHEEL
UL LISTED FOR SMOKE CONTROL SYSTEMS

- > 12 to 54 inches (305 mm to 1,375 mm) wheel diameters
- > Airflow to 80,000 CFM (135,900 m³/hour)
- > Static pressure to 4 inches w.g. (990 Pa)
- > UL listed for Smoke Control Systems
- > **Typical Applications:** Elevator Shaft Exhaust/Pressurization, Emergency Smoke Exhaust, Stairwell Pressurization



CATALOG AX250



TCTA

TUBEAXIAL FAN, CAST ALUMINUM WHEEL

- > 12 to 60 inches (305 mm to 1,525 mm) wheel diameters
- > Airflow to 96,000 CFM (163,100 m³/hour)
- > Static pressure to 5 inches w.g. (1,240 Pa)
- > UL 705 listing available
- > **Typical Applications:** Air Pollution Control, General HVAC, Clean Room HEPA Filtration, Odor Control, Parking Garage Ventilation, Waste Water Treatment

CATALOG AX200



TCVS

VANEAXIAL FAN, STEEL WHEEL

- > 12 to 54 inches (305 mm to 1,375 mm) wheel diameters
- > Airflow to 80,000 CFM (135,900 m³/hour)
- > Static pressure to 4 inches w.g. (990 Pa)
- > UL 705 listing available
- > **Typical Applications:** Air Pollution Control, Heat Transfer Equipment Testing, Odor Control, Waste Water Treatment



CATALOG AX250



FPAC

VANEAXIAL FAN, PNEUMATICALLY CONTROLLABLE PITCH-IN-MOTION

- > 32 to 79 inches (815 mm to 2,010 mm) wheel diameters
- > Airflow to 250,000 CFM (424,800 m³/hour)
- > Static pressure to 12 inches w.g. (2,980 Pa)
- > **Typical Applications:** Air Pollution Control, Clean Room HEPA Filtration, Parking Garage Ventilation

CATALOG AX351



FPDA

VANEAXIAL FAN, MANUALLY ADJUSTABLE PITCH-AT-REST

- > 32 to 79 inches (815 mm to 2,010 mm) wheel diameters
- > Airflow to 250,000 CFM (424,800 m³/hour)
- > Static pressure to 12 inches w.g. (2,980 Pa)
- > **Typical Applications:** Air Pollution Control, Clean Room HEPA Filtration, Parking Garage Ventilation

CATALOG AX351



TCBS

PAINT BOOTH EXHAUST TUBEAXIAL FAN, BELT DRIVEN

- > 12 to 42 inches (305 mm to 1,070 mm) wheel diameters
- > Airflow to 36,100 CFM (61,300 m³/hour)
- > Static pressure to 1.25 inches w.g. (310 Pa)
- > **Typical Applications:** Spray Booth Exhaust

CATALOG AX220



TCDF / TCDFQ / TCDFX / TCDFZ

DUCT FAN, FIXED AND ADJUSTABLE PITCH BLADES

- > 12 to 72 inches (305 mm to 1,830 mm) wheel diameters
- > Airflow to 75,000 CFM (127,400 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > **Typical Applications:** Air Pollution Control, Data Center Exhaust, General HVAC, General Rooftop Exhaust, Heat Transfer Equipment Testing, Parking Garage Ventilation

FAN SELECTOR



TAMF

FIBERGLASS TYPE FG7 TUBEAXIAL FAN, BELT DRIVEN

- > 14 to 60 inches (355 mm to 1,525 mm) wheel diameters
- > Airflow to 51,900 CFM (88,200 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > **Typical Applications:** Chemical/Corrosive Environments, Exhaust Applications, Water Treatment, Air Pollution Control, Process Air, High Moisture Environments

CATALOG 430




TAHF

FIBERGLASS TYPE TF TUBEAXIAL FAN, BELT DRIVEN

- > 12 to 60 inches (305 mm to 1,525 mm) wheel diameters
- > Airflow to 83,200 CFM (141,400 m³/hour)
- > Static pressure to 2.5 inches w.g. (620 Pa)
- > **Typical Applications:** Chemical/Corrosive Environments, Exhaust Applications, Water Treatment, Air Pollution Control, Process Air, High Moisture Environments

CATALOG 430

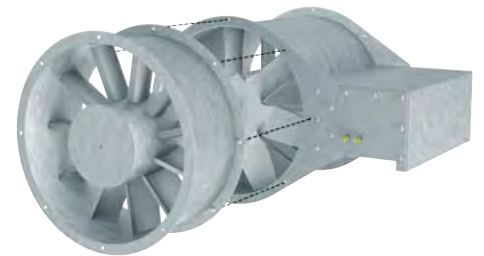


VAHF

FIBERGLASS TYPE TF VANEAXIAL FAN, BELT DRIVEN

- > 12 to 60 inches (305 mm to 1,525 mm) wheel diameters
- > Airflow to 81,200 CFM (138,000 m³/hour)
- > Static pressure to 4 inches w.g. (1,000 Pa)
- > **Typical Applications:** Chemical/Corrosive Environments, Exhaust Applications, Water Treatment, Air Pollution Control, Process Air, High Moisture Environments

CATALOG 430



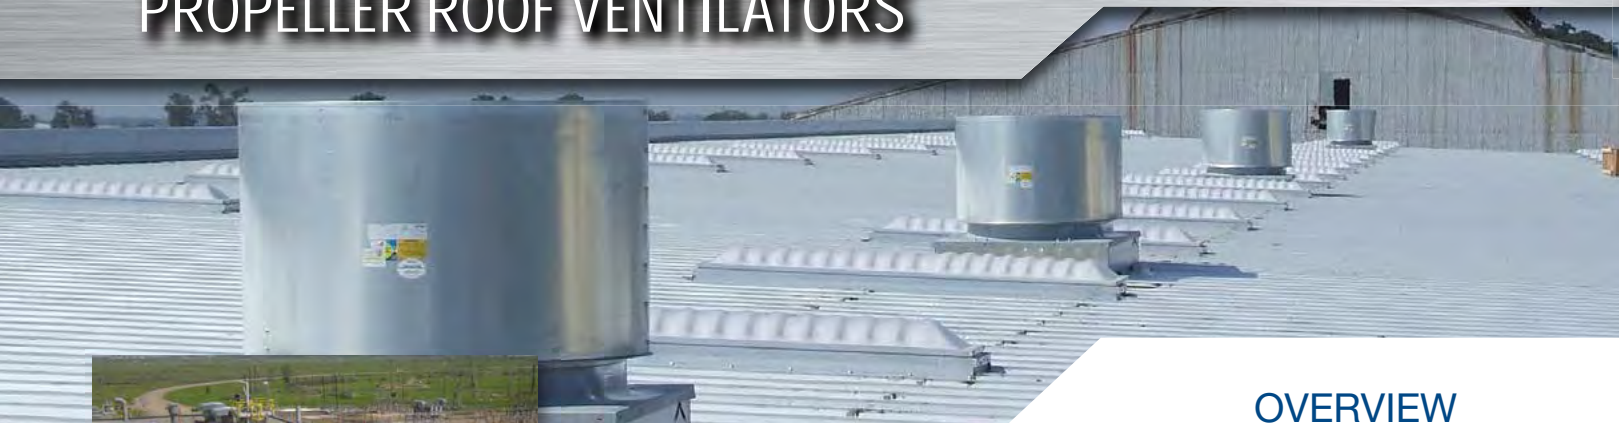

OVERVIEW

PROPELLER ROOF VENTILATORS

Propeller Roof Ventilators provide cost effective, general purpose exhaust ventilation of commercial buildings as well as a large variety of industrial applications. Belt and direct drive models are available with cast aluminum, adjustable pitch or fabricated steel, fixed pitch propellers to meet specific application requirements.

PROPELLER TYPES

Fixed Pitch Fabricated Steel and Cast Aluminum, Adjustable Pitch Cast Aluminum

TYPICAL INDUSTRIES

Agriculture, Air Pollution Control, Automotive, Boilers, Brick, Car Wash, Commercial Plan & Spec, Composting, Ethanol, Food & Beverage, Foundry, General Manufacturing, Glass, Green/LEED, HVAC, Institutional & Hospitality, Metal & Minerals, Microchip, Mining, Nuclear, OEM, Petrochemical, Pharmaceutical, Power Generation, Pulp & Paper, Recycling, Textile, Transportation

COMMON ACCESSORIES

Access Doors, Backdraft Dampers, Roof Curbs, Inlet Guards, Birdscreens, Insect Screens, Two Groove Drive Minimum, Fusible Links, Belt Tubes, Motor Covers, Externally Mounted Conduit Boxes, Tall Base, Curb Hinges, Metal Nameplates, Automatic Belt Tensioners, Extended Lube Lines, Tie Downs, Insulated Hoods, Magnetic Damper Latches, AMCA Spark B Construction, Roof Curbs, Curb Extensions, Disconnect Switches, Single Point Wiring, Special Coatings

CERTIFICATIONS

UL 705 Listed for Electrical, UL Listed for Smoke Control Systems



Model THB
Manufacturing Plant Exhaust



Model LUBMO
Warehouse Exhaust



Model LHB
Storage Facility



Model THD
Glass Manufacturing

LUD

LOW PROFILE UPBLAST PROPELLER ROOF VENTILATOR, DIRECT DRIVE

- > 14 to 48 inches (355 mm to 1,220 mm) wheel diameters
- > Airflow to 31,400 CFM (53,300 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Generator Room Ventilation, General Warehouse Ventilation



Available For Quickship



CATALOG 4870

LUB

LOW PROFILE UPBLAST PROPELLER ROOF VENTILATOR, BELT DRIVEN

- > 21 to 60 inches (535 mm to 1,525 mm) wheel diameters
- > Airflow to 60,800 CFM (103,300 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Generator Room Ventilation, General Warehouse Ventilation



Available For Quickship




CATALOG 4870

LUBMO

LOW PROFILE MOTOR OUT OF AIRSTREAM UPBLAST PROPELLER ROOF VENTILATOR, BELT DRIVEN

- > 21 to 60 inches (535 mm to 1,525 mm) wheel diameters
- > Airflow to 60,800 CFM (103,300 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Generator Room Ventilation, General Warehouse Ventilation



Available For Quickship




CATALOG 4870

LUBSH

LOW PROFILE UPBLAST PROPELLER ROOF VENTILATOR, BELT DRIVEN
UL LISTED FOR SMOKE CONTROL SYSTEMS

- > 21 to 60 inches (535 mm to 1,525 mm) wheel diameters
- > Airflow to 60,800 CFM (103,300 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > UL listed for Smoke Control Systems
- > **Typical Applications:** Elevator Shaft Exhaust/Pressurization, Emergency Smoke Exhaust, Stairwell Pressurization/Exhaust, General Warehouse Ventilation



Available For Quickship



CATALOG 4870



CATALOG 4850

TUD

UPBLAST TUBEAXIAL ROOF VENTILATOR, DIRECT DRIVE

- > 14 to 48 inches (355 mm to 1,220 mm) wheel diameters
- > Airflow to 39,100 CFM (66,400 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Generator Room Ventilation, General Warehouse Ventilation



CATALOG 4850

TUB

UPBLAST TUBEAXIAL ROOF VENTILATOR, BELT DRIVEN

- > 14 to 60 inches (355 mm to 1,525 mm) wheel diameters
- > Airflow to 72,400 CFM (123,000 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Generator Room Ventilation, General Warehouse Ventilation



CATALOG 4850

TUBSH

UPBLAST TUBEAXIAL ROOF VENTILATOR, BELT DRIVEN
UL LISTED FOR SMOKE CONTROL SYSTEMS

- > 24 to 60 inches (610 mm to 1,525 mm) wheel diameters
- > Airflow to 70,700 CFM (120,100 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL listed for Smoke Control Systems
- > **Typical Applications:** Elevator Shaft Exhaust/Pressurization, Emergency Smoke Exhaust, Stairwell Pressurization/Exhaust, General Warehouse Ventilation



CATALOG 430

PRVF


FIBERGLASS TUBEAXIAL ROOF VENTILATOR

- > 14 to 60 inches (355 mm to 1,525 mm) wheel diameters
- > Airflow to 50,800 CFM (86,300 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > **Typical Applications:** Exhaust Applications, Water Treatment, Chemical/Corrosive Environments, Air Pollution Control, Process Air, High Moisture Environments

LHD

LOW PROFILE HOODED PRV, DIRECT DRIVE

- > 14 to 48 inches (355 mm to 1,220 mm) wheel diameters
- > Airflow to 32,200 CFM (54,700 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Generator Room Ventilation, General Warehouse Ventilation

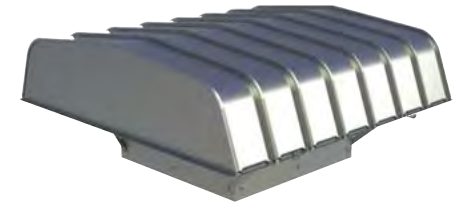


CATALOG 4860

LHDF (FILTERED)

LOW PROFILE HOODED PRV, DIRECT DRIVE

- > 21 to 48 inches (535 mm to 1,220 mm) wheel diameters
- > Airflow to 30,400 CFM (51,600 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > UL 705 listed
- > **Typical Applications:** General HVAC, Generator Room Ventilation, General Rooftop Supply, General Warehouse Ventilation

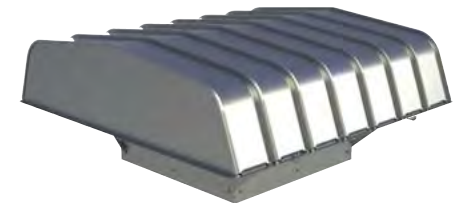


CATALOG 4860

LHB

LOW PROFILE HOODED PRV, BELT DRIVEN

- > 21 to 60 inches (535 mm to 1,525 mm) wheel diameters
- > Airflow to 62,800 CFM (106,700 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Generator Room Ventilation, General Warehouse Ventilation

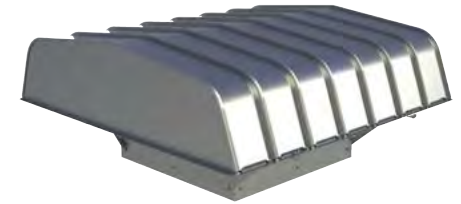


CATALOG 4860


LHBF (FILTERED)

LOW PROFILE HOODED PRV, BELT DRIVEN

- > 21 to 60 inches (535 mm to 1,525 mm) wheel diameters
- > Airflow to 57,600 CFM (97,900 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > UL 705 listed
- > **Typical Applications:** General HVAC, Generator Room Ventilation, General Rooftop Supply

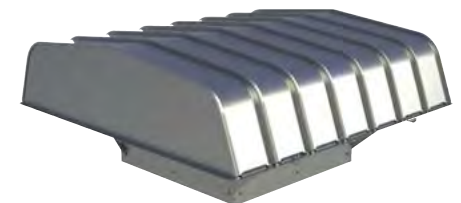

CATALOG 4860

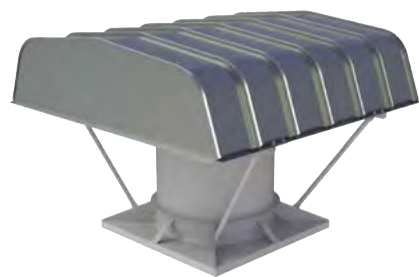

THD

HOODED TUBEAXIAL ROOF VENTILATOR, DIRECT DRIVE

- > 14 to 48 inches (355 mm to 1,220 mm) wheel diameters
- > Airflow to 36,400 CFM (61,800 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Generator Room Ventilation, General Warehouse Ventilation

CATALOG 4850




LPRV / LPRVQ / LPRVX

LOW PROFILE UPBLAST PRV (PROPELLER FAN)

- > 12 to 72 inches (305 mm to 1,830 mm) wheel diameters
- > Airflow to 75,000 CFM (127,400 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Generator Room Ventilation, General Warehouse Ventilation

CATALOG AX010

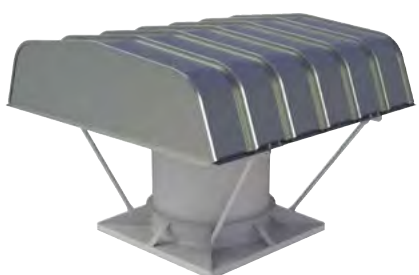

THDF (FILTERED)

HOODED TUBEAXIAL ROOF VENTILATOR, DIRECT DRIVE

- > 21 to 48 inches (355 mm to 1,220 mm) wheel diameters
- > Airflow to 36,400 CFM (61,800 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > UL 705 listed
- > **Typical Applications:** General HVAC, Generator Room Ventilation, General Rooftop Supply, General Warehouse Ventilation

CATALOG 4850





HVWP / HVWPQ / HVWPX

LOW PROFILE HOODED PRV (PROPELLER FAN)

- > 12 to 72 inches (305 mm to 1,830 mm) wheel diameters
- > Airflow to 75,000 CFM (127,400 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > **Typical Applications:** General HVAC, Generator Room Ventilation, General Rooftop Supply, General Warehouse Ventilation

CATALOG AX010

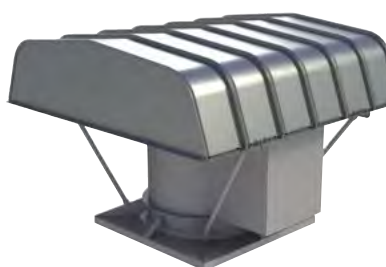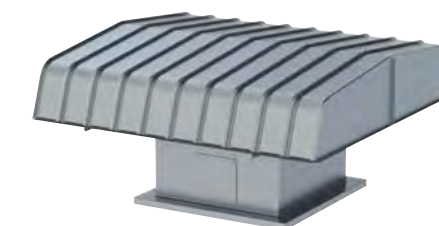

THB

HOODED TUBEAXIAL ROOF VENTILATOR, BELT DRIVEN

- > 14 to 60 inches (355 mm to 1,525 mm) wheel diameters
- > Airflow to 63,800 CFM (108,400 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > UL 705 listed
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Generator Room Ventilation, General Warehouse Ventilation

CATALOG 4850





HFWP / HFWPQ / HFWPX (FILTERED)

HOODED PRV (PROPELLER FAN)

- > 12 to 72 inches (305 mm to 1,830 mm) wheel diameters
- > Airflow to 75,000 CFM (127,400 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > **Typical Applications:** Data Center Exhaust, General HVAC, General Rooftop Exhaust, Generator Room Ventilation, General Warehouse Ventilation

CATALOG AX010

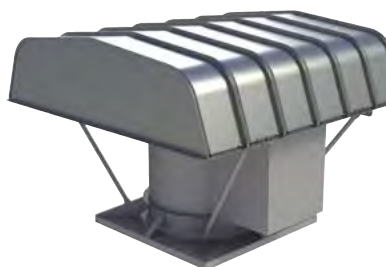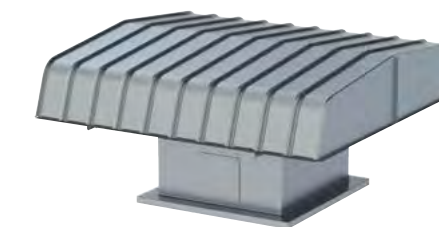

THBF (FILTERED)

HOODED TUBEAXIAL ROOF VENTILATOR, BELT DRIVEN

- > 21 to 60 inches (535 mm to 1,525 mm) wheel diameters
- > Airflow to 63,800 CFM (108,400 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > UL 705 listed
- > **Typical Applications:** General HVAC, Generator Room Ventilation, General Rooftop Supply, General Warehouse Ventilation

CATALOG 4850





OVERVIEW

RADIAL BLADED FANS

Radial Bladed Fans provide a solution for a wide range of industrial applications. The heavy gauge, all-welded construction has earned it the reputation of being the “workhorse” of the industry—a design proven by years of service handling dirty, abrasive, sticky or bulky particulate laden airstreams. With multiple sizes and materials available there is a fan available to meet the applications needs.

WHEEL TYPES

Fabricated Paddle Wheels, Wool Wheels with Backplate & Heavy Gusseted Bulk Material Handling Wheels, Fiberglass, Cast Aluminum Radial or Backward Curved

TYPICAL INDUSTRIES

Aerospace, Agriculture, Air Pollution Control, Asphalt, Automotive, Boilers, Brick, Cement, Chemical, Coal, Composting, Ethanol, Foundry, General Manufacturing, Glass, Industrial Processes, Metal & Minerals, Mining, Nuclear, OEM, Petrochemical, Pharmaceutical, Power Generation, Pulp & Paper, Recycling, Textile, Water Treatment

COMMON ACCESSORIES

Access Door, Belt Guards, Drain, Inlet/Outlet Companion Flange, Inlet/Outlet Damper, Inlet Filter, Inlet/Outlet Flange, Inlet/Outlet Screen, Inlet/Outlet Silencer, Shaft & Bearing Guard, Shaft Seal, Split Housing, Vibration Isolation, Special Coatings, Insulated Housings

OPTIONAL CONSTRUCTION

Abrasion Resistant Construction, High Temperature Construction, Nominally Leak-Tight Construction, Spark Resistant Construction (Type A, B, and C), Special Materials



Model RBO
Recirculation Fan for Melting Plastic



Model TPB
Hospital Exhaust



Model RBO
Sawdust Mill

RBO

INDUSTRIAL RADIAL BLADE FAN, PADDLE WHEEL

- > 8.75 to 104.25 inches (225 mm to 2,650 mm) wheel diameters
- > Airflow to 141,800 CFM (240,900 m³/hour)
- > Static pressure to 32 inches w.g. (7,960 Pa)
- > AMCA licensed for Air and Fan Efficiency Grade
- > **Typical Applications:** Dust Collection, Pneumatic Conveying, Water Treatment, Explosion-Proof Processes, General HVAC, Air Pollution Control, Material Handling, High Temperature



Available For
Quickship



CATALOG 902 & 911

RBR

INDUSTRIAL RADIAL BLADE FAN, PADDLE WHEEL

- > 45.13 to 85.25 inches (1,150 mm to 2,165 mm) wheel diameters
- > Airflow to 94,800 CFM (161,100 m³/hour)
- > Static pressure to 32 inches w.g. (7,960 Pa)
- > AMCA licensed for Air and Fan Efficiency Grade
- > **Typical Applications:** Dust Collection, Pneumatic Conveying, Water Treatment, Explosion-Proof Processes, General HVAC, Air Pollution Control, Material Handling, High Temperature




CATALOG 902 & 911

RBW

INDUSTRIAL RADIAL BLADE FAN, BACKPLATE WOOL WHEEL

- > 8.75 to 104.25 inches (225 mm to 2,650 mm) wheel diameters
- > Airflow to 141,800 CFM (240,900 m³/hour)
- > Static pressure to 32 inches w.g. (7,960 Pa)
- > AMCA licensed for Air and Fan Efficiency Grade
- > **Typical Applications:** Dust Collection, Pneumatic Conveying, Water Treatment, Explosion-Proof Processes, General HVAC, Air Pollution Control, Material Handling, High Temperature



CATALOG 902 & 911

RBP

INDUSTRIAL RADIAL BLADE FAN, PAPER HANDLING WHEEL

- > 19.13 to 45.13 inches (485 mm to 1,150 mm) wheel diameters
- > Airflow to 26,500 CFM (45,000 m³/hour)
- > Static pressure to 32 inches w.g. (7,960 Pa)
- > **Typical Applications:** Dust Collection, Pneumatic Conveying, Water Treatment, Explosion-Proof Processes, General HVAC, Air Pollution Control, Material Handling, High Temperature



CATALOG 902 & 911



RBA

INDUSTRIAL RADIAL BLADE FAN, AIR HANDLING WHEEL

- > 8.75 to 104.25 inches (225 mm to 2,650 mm) wheel diameters
- > Airflow to 141,800 CFM (240,900 m³/hour)
- > Static pressure to 32 inches w.g. (7,960 Pa)
- > AMCA licensed for Air and Fan Efficiency Grade
- > **Typical Applications:** High Temperature, Pneumatic Conveying, Explosion-Proof Processes, Dust Collection, Water Treatment, Process Cooling, Drying Applications, General HVAC, Air Pollution Control



CATALOG 902 & 911

TPD

CAST ALUMINUM PRESSURE BLOWER, DIRECT DRIVE

- > 7 to 18 inches (180 mm to 460 mm) wheel diameters
- > Airflow to 2,800 CFM (4,800 m³/hour)
- > Static pressure to 20 inches w.g. (4,970 Pa)
- > **Typical Applications:** Air Pollution Control, Dust Collection, General HVAC, Explosion-Proof Processes, Process Cooling, Exhaust, Drying Applications, Material Handling, Pneumatic Conveying, Vacuum Systems, Waste Water Treatment, Combustion Air, Moisture Blow-Off



Available For Quickship

CATALOG 820



RBOF

FIBERGLASS RADIAL BLADE CENTRIFUGAL FAN

- > 10.63 to 57.5 inches (270 mm to 1,465 mm) wheel diameters
- > Airflow to 38,300 CFM (65,100 m³/hour)
- > Static pressure to 18 inches w.g. (4,480 Pa)
- > AMCA licensed for Air and Fan Efficiency Grade
- > **Typical Applications:** Chemical/Corrosive Environments, Marine, Water Treatment, Exhaust Applications, Explosion-Proof Processes, Air Pollution Control, Process Air, General HVAC, High Moisture Environments



CATALOG 430

TPB


CAST ALUMINUM PRESSURE BLOWER, BELT DRIVEN

- > 8 to 18 inches (205 mm to 460 mm) wheel diameters
- > Airflow to 2,400 CFM (4,100 m³/hour)
- > Static pressure to 22 inches w.g. (5,470 Pa)
- > **Typical Applications:** Air Pollution Control, Dust Collection, General HVAC, Explosion-Proof Processes, Process Cooling, Exhaust, Drying Applications, Material Handling, Pneumatic Conveying, Vacuum Systems, Waste Water Treatment, Combustion Air, Moisture Blow-Off



Available For Quickship

CATALOG 820

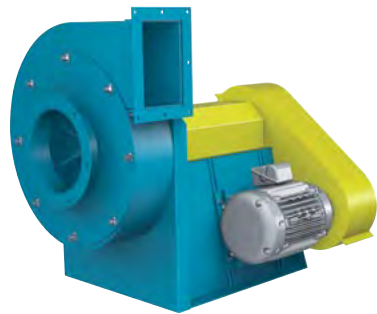

JRW

COMPACT DESIGN INDUSTRIAL FAN

- > 8.75 to 15.63 inches (225 mm to 400 mm) wheel diameters
- > Airflow to 2,000 CFM (3,400 m³/hour)
- > Static pressure to 14 inches w.g. (3,480 Pa)
- > **Typical Applications:** Air Pollution Control, Pneumatic Conveying, Boiler Systems, Process Cooling, Exhaust, Water Treatment, Dust Collection, Drying Applications, Explosion-Proof Processes, General HVAC, Vacuum Systems, General Manufacturing



Available For Quickship

CATALOG 800



CIW

CAST IRON BLOWER

- > 6.75 to 14 inches (175 mm to 355 mm) wheel diameters
- > Airflow to 2,000 CFM (3,400 m³/hour)
- > Static pressure to 12 inches w.g. (2,980 Pa)
- > **Typical Applications:** Air Pollution Control, Pneumatic Conveying, Boiler Systems, Process Cooling, Water Treatment, Exhaust, Dust Collection, Drying Applications, Explosion-Proof Processes, General HVAC, Vacuum Systems, General Manufacturing, Combustion Air



Available For Quickship

CATALOG 850





OVERVIEW

RADIAL TIP & HIGH EFFICIENCY FANS

Radial Tip & High Efficiency Fans offer great efficiencies for a wide range of applications requiring high airflow and moderate pressures. The non-overloading design can handle high temperatures, corrosive airstreams and light particulate where the radial tip designs are better suited for dirty, particulate laden air. With high airflows the radial tip fan is much more efficient than the comparable Radial Blade Fan.

WHEEL TYPES

High Efficiency Non-Overloading Backward Curved & Airfoil, Self-Cleaning Radial Tip

TYPICAL INDUSTRIES

Asphalt, Boiler, Brick, Cement, Chemical, Coal, Ethanol, Foundry, Glass, Industrial Processes, Metal & Minerals, Mining, Nuclear, Petrochemical, Power Generation, Pulp & Paper, Water Treatment

COMMON ACCESSORIES

Access Door, Belt Guards, Evasé, Drain, Inlet/Outlet Companion Flange, Inlet/Outlet Screen, Piezometer Ring Airflow Measurement System, Shaft & Bearing Guards, Shaft Seal, Split Housing, Inlet Box, Inlet/Outlet Dampers, Bases, Special Coatings, Insulated Housings

OPTIONAL CONSTRUCTION

Special Width & Diameter Wheels, High Temperature, Nominally Leak-Tight Construction, Spark Resistant Construction (Type A, B, and C)



Model HIB
Process Exhaust Fan



Model HAF
Pneumatic Dust Collection




Model HIB
DeNOx Process



HAF

HIGH EFFICIENCY INDUSTRIAL AIRFOIL FAN

- > 25 to 90.75 inches (635 mm to 2,305 mm) wheel diameters
- > Airflow to 170,000 CFM (288,800 m³/hour)
- > Static pressure to 50 inches w.g. (12,430 Pa)
- > **Typical Applications:** Drying Applications, Process Cooling, Exhaust, Dust Collection, Explosion-Proof Processes, Forced Draft, Induced Draft, Process Ventilation, Water Treatment, Pollution Control

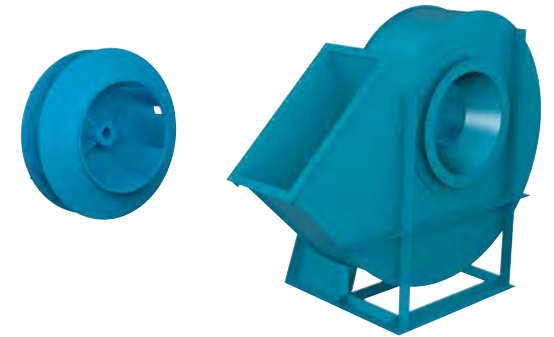


CATALOG 1150

HIB

HIGH EFFICIENCY INDUSTRIAL BACKWARD CURVED FAN

- > 20.5 to 90.75 inches (520 mm to 2,305 mm) wheel diameters
- > Airflow to 177,500 CFM (301,600 m³/hour)
- > Static pressure to 36 inches w.g. (8,950 Pa)
- > **Typical Applications:** Drying Applications, Process Cooling, Exhaust, Dust Collection, Explosion-Proof Processes, Forced Draft, Induced Draft, Process Ventilation, Water Treatment, Pollution Control

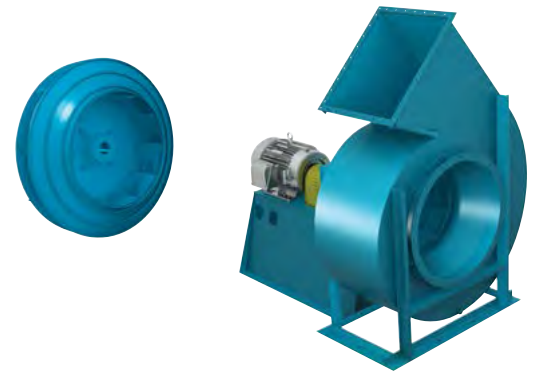


CATALOG 1100

RTF

RADIAL TIP FAN

- > 20.5 to 90.75 inches (520 mm to 2,305 mm) wheel diameters
- > Airflow to 223,800 CFM (380,200 m³/hour)
- > Static pressure to 36 inches w.g. (8,950 Pa)
- > AMCA licensed for Air and Fan Efficiency Grade
- > **Typical Applications:** Exhaust Applications, Dust Collection, Explosion-Proof Processes, Induced Draft, Material Handling, Air Pollution Control, Process Ventilation, Pollution Control, Vacuum Systems, General Manufacturing

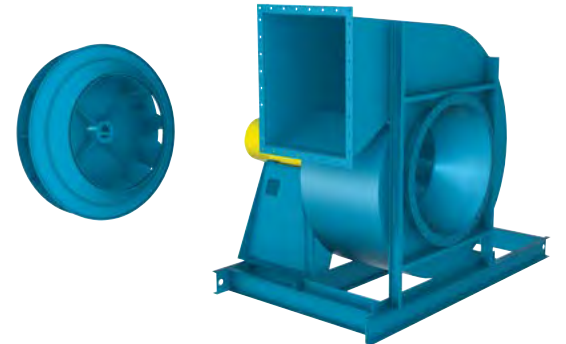


CATALOG 950

HRT

RADIAL TIP FAN, HIGH SPECIFIC SPEED

- > 27 to 80.75 inches (685 mm to 2,055 mm) wheel diameters
- > Airflow to 254,700 CFM (432,700 m³/hour)
- > Static pressure to 32 inches w.g. (7,960 Pa)
- > **Typical Applications:** Exhaust Applications, Dust Collection, Explosion-Proof Processes, Induced Draft, Material Handling, Air Pollution Control, Process Ventilation, Pollution Control, Vacuum Systems, General Manufacturing

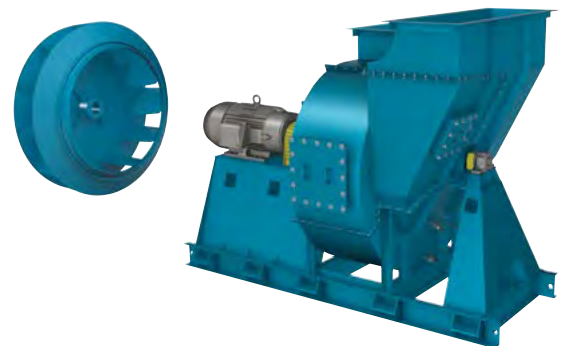

CATALOG 980



OVERVIEW

PRESSURE BLOWERS

Pressure Blowers are ideal for applications requiring high pressures at relatively low volumes of air. Pressure blower performance will remain stable through the operating range and can be turned down to zero flow via a discharge damper. Twin City Fan offers a wide range of fan types and sizes to meet clean or particulate laden airstream applications.

WHEEL TYPES

Backward Curved, Backward Inclined & Radial Fabricated Wheels in Open or Shrouded Designs, Fiberglass, Cast Aluminum Radial or Backward Curved

TYPICAL INDUSTRIES

Air Pollution Control, Asphalt, Boilers, Brick, Cement, Chemical, Coal, Composting, Ethanol, Food & Beverage, Foundry, General Manufacturing, Glass, Industrial Processes, Metal & Minerals, Microchip, Mining, Nuclear, Petrochemical, Pharmaceutical, Power Generation, Pulp & Paper, Recycling, Textile, Transportation, Water Treatment

COMMON ACCESSORIES

Access Door, Belt Guards, Drain, Evasé, Inlet Bell, Inlet Box, Inlet/Outlet Companion Flange, Inlet/Outlet Damper, Inlet Filter, Inlet/Outlet Flange, Inlet/Outlet Screen, Inlet/Outlet Silencer, Outlet Blast Gate, Shaft & Bearing Guard, Shaft Seal, Split Housing, Vibration Isolation, Special Coatings, Insulated Housings

OPTIONAL CONSTRUCTION

High Temperature Construction, Nominally Leak-Tight Construction, Spark Resistant Construction (Type A, B, and C), Special Materials



Model TBR
NOx Exhaust



Model MBO
Flue Gas Recirculation



Model TPB
Hospital Ventilation



Model TBR
Process Fan

TBNA

TURBO PRESSURE BLOWER, ALUMINUM WHEEL

- > 14.5 to 38 inches (370 mm to 965 mm) wheel diameters
- > Airflow to 20,000 CFM (34,000 m³/hour)
- > Static pressure to 128 inches w.g. (31,820 Pa)
- > **Typical Applications:** Air Pollution Control, Process Cooling, Dust Collection, Explosion-Proof Processes, Drying Applications, Vacuum Systems, Process Applications, General Manufacturing, Exhaust, Waste Water Treatment, Combustion Air




CATALOG 1250

TBNS

TURBO PRESSURE BLOWER, STEEL WHEEL

- > 14.5 to 38 inches (370 mm to 965 mm) wheel diameters
- > Airflow to 20,000 CFM (34,000 m³/hour)
- > Static pressure to 128 inches w.g. (31,820 Pa)
- > **Typical Applications:** Air Pollution Control, Process Cooling, Dust Collection, Explosion-Proof Processes, Drying Applications, Material Handling, Pneumatic Conveying, Process Applications, Waste Water Treatment, Vacuum Systems, Combustion Air, Exhaust, General Manufacturing

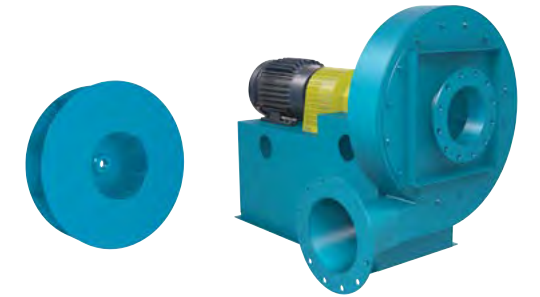


CATALOG 1250

TBA

TURBO PRESSURE BLOWER, AIR HANDLING WHEEL

- > 11.19 to 32.06 inches (285 mm to 815 mm) wheel diameters
- > Airflow to 28,700 CFM (48,800 m³/hour)
- > Static pressure to 70 inches w.g. (17,400 Pa)
- > **Typical Applications:** Air Pollution Control, Process Cooling, Dust Collection, Explosion-Proof Processes, Drying Applications, Vacuum Systems, Process Applications, General Manufacturing, Exhaust, Waste Water Treatment, Combustion Air

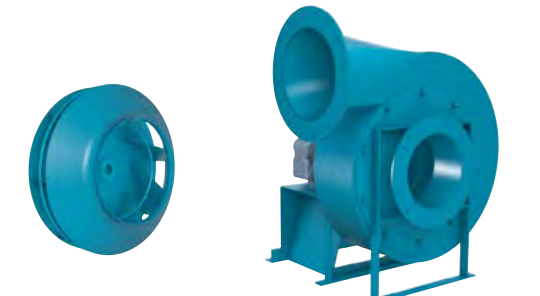


CATALOG 1200

TBR

TURBO PRESSURE BLOWER, RADIAL BLADED WHEEL

- > 10.75 to 35.19 inches (275 mm to 895 mm) wheel diameters
- > Airflow to 10,100 CFM (17,200 m³/hour)
- > Static pressure to 104 inches w.g. (25,860 Pa)
- > **Typical Applications:** Air Pollution Control, Process Cooling, Dust Collection, Explosion-Proof Processes, Drying Applications, Vacuum Systems, Process Applications, General Manufacturing, Exhaust, Waste Water Treatment, Combustion Air

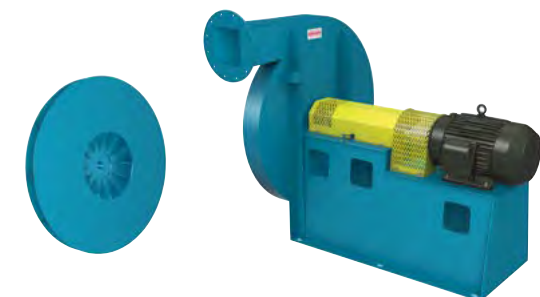


CATALOG 1200


BCN

BACKWARD CURVED HIGH PRESSURE FAN

- > 27 to 73 inches (685 mm to 1,855 mm) wheel diameters
- > Airflow to 75,000 CFM (127,400 m³/hour)
- > Static pressure to 100 inches w.g. (24,860 Pa)
- > **Typical Applications:** Air Pollution Control, Boiler Systems, Exhaust, Process Cooling, Dust Collection, Forced Draft, Explosion-Proof Processes, Water Treatment, General HVAC, Process Applications, General Manufacturing, Combustion Air, Drying

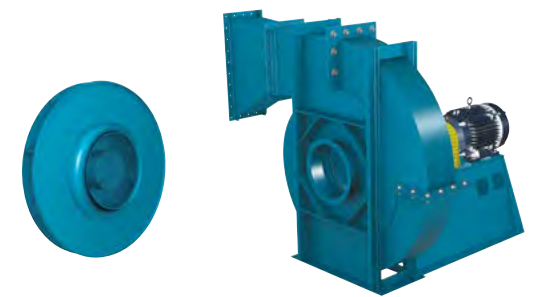

CATALOG 1450

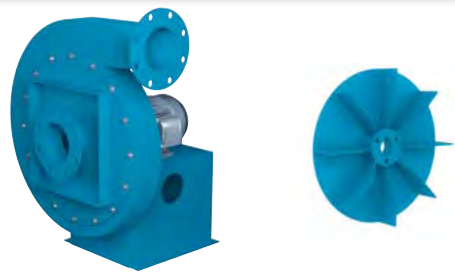

FAN SELECTOR

PBW

PRESSURE BLOWER, BACKPLATE RADIAL

- > 19 to 26 inches (485 mm to 660 mm) wheel diameters
- > Airflow to 7,700 CFM (13,100 m³/hour)
- > Static pressure to 59.3 inches w.g. (14,700 Pa)
- > **Typical Applications:** Textile Fiber Stripping and Recycling, Air Pollution Control, Process Cooling, Dust Collection, Explosion-Proof Processes, Drying Applications, Material Handling, Pneumatic Conveying, Process Applications, Waste Water Treatment, Vacuum Systems, Combustion Air, Exhaust, General Manufacturing




CATALOG 1400

MBO

HEAVY DUTY PRESSURE BLOWER, OPEN RADIAL

- > 19.63 to 58.94 inches (500 mm to 1,500 mm) wheel diameters
- > Airflow to 18,000 CFM (30,600 m³/hour)
- > Static pressure to 170 inches w.g. (42,270 Pa)
- > **Typical Applications:** Air Pollution Control, Dust Collection, Exhaust, Process Cooling, Explosion-Proof Processes, General HVAC, Drying Applications, Vacuum Systems, Material Handling, Pneumatic Conveying, Waste Water Treatment, Process Applications, Combustion Air




CATALOG 1400

MBR

HEAVY DUTY PRESSURE BLOWER, HIGH PRESSURE AIR HANDLING

- > 19.63 to 58.94 inches (500 mm to 1,500 mm) wheel diameters
- > Airflow to 18,000 CFM (30,600 m³/hour)
- > Static pressure to 180 inches w.g. (44,750 Pa)
- > **Typical Applications:** Air Pollution Control, Dust Collection, Exhaust, Process Cooling, Explosion-Proof Processes, General HVAC, Drying Applications, Vacuum Systems, Material Handling, Pneumatic Conveying, Waste Water Treatment, Process Applications, Combustion Air




CATALOG 1400

MBW

HEAVY DUTY PRESSURE BLOWER, BACKPLATE RADIAL

- > 19.63 to 58.94 inches (500 mm to 1,500 mm) wheel diameters
- > Airflow to 20,000 CFM (34,000 m³/hour)
- > Static pressure to 160 inches w.g. (39,780 Pa)
- > **Typical Applications:** Air Pollution Control, Dust Collection, Exhaust, Process Cooling, Explosion-Proof Processes, Drying, General HVAC, Vacuum Systems, Material Handling, Pneumatic Conveying, Waste Water Treatment, Process Applications, Combustion Air




CATALOG 430

HPF

FIBERGLASS HIGH PRESSURE BLOWER, RADIAL BLADE

- > 18 to 28 inches (460 mm to 715 mm) wheel diameters
- > Airflow to 4,700 CFM (8,000 m³/hour)
- > Static pressure to 36 inches w.g. (8,950 Pa)
- > **Typical Applications:** Water Treatment, Explosion-Proof Processes, Chemical/Corrosive Environments, Air Pollution Control, Process Air, Exhaust, High Moisture Environments, General HVAC, Combustion Air, Marine

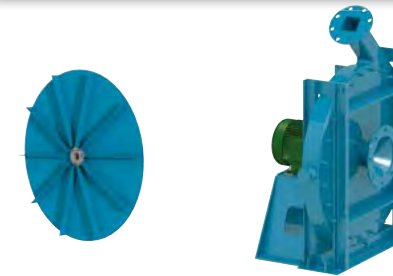


CATALOG 1300

HRO

HIGH PRESSURE RADIAL PRESSURE BLOWER, OPEN WHEEL

- > 19.75 to 61.25 inches (505 mm to 1,555 mm) wheel diameters
- > Airflow to 8,500 CFM (14,400 m³/hour)
- > Static pressure to 103 inches w.g. (25,610 Pa)
- > **Typical Applications:** Air Pollution Control, Dust Collection, Process Cooling, Explosion-Proof Processes, Drying Applications, Exhaust, Vacuum Systems, Material Handling, Pneumatic Conveying, Waste Water Treatment, Process Applications, Combustion Air, General HVAC



CATALOG 1300

HRS

HIGH PRESSURE RADIAL PRESSURE BLOWER, SHROUDED WHEEL

- > 19.75 to 61.25 inches (505 mm to 1,555 mm) wheel diameters
- > Airflow to 10,000 CFM (17,000 m³/hour)
- > Static pressure to 120 inches w.g. (29,840 Pa)
- > **Typical Applications:** Air Pollution Control, Dust Collection, Process Cooling, Explosion-Proof Processes, Drying Applications, Vacuum Systems, Material Handling, Exhaust, Pneumatic Conveying, Waste Water Treatment, Process Applications, Combustion Air, General HVAC

TPD

CAST ALUMINUM PRESSURE BLOWER, DIRECT DRIVE

- > 7 to 18 inches (180 mm to 460 mm) wheel diameters
- > Airflow to 2,800 CFM (4,800 m³/hour)
- > Static pressure to 20 inches w.g. (4,970 Pa)
- > **Typical Applications:** Air Pollution Control, Dust Collection, General HVAC, Explosion-Proof Processes, Process Cooling, Exhaust, Drying Applications, Material Handling, Pneumatic Conveying, Vacuum Systems, Waste Water Treatment, Combustion Air, Moisture Blow-Off



Available For Quickship

CATALOG 820

TPB

CAST ALUMINUM PRESSURE BLOWER, BELT DRIVEN

- > 8 to 18 inches (205 mm to 460 mm) wheel diameters
- > Airflow to 2,400 CFM (4,100 m³/hour)
- > Static pressure to 22 inches w.g. (5,470 Pa)
- > **Typical Applications:** Air Pollution Control, Dust Collection, General HVAC, Explosion-Proof Processes, Process Cooling, Exhaust, Drying Applications, Material Handling, Pneumatic Conveying, Vacuum Systems, Waste Water Treatment, Combustion Air, Moisture Blow-Off



Available For Quickship

CATALOG 820

CIW

CAST IRON BLOWER

- > 6.75 to 14 inches (175 mm to 355 mm) wheel diameters
- > Airflow to 2,000 CFM (3,400 m³/hour)
- > Static pressure to 12 inches w.g. (2,980 Pa)
- > **Typical Applications:** Air Pollution Control, Pneumatic Conveying, Boiler Systems, Process Cooling, Water Treatment, Dust Collection, Drying Applications, Explosion-Proof Processes, General HVAC, Exhaust, Vacuum Systems, General Manufacturing, Combustion Air



Available For Quickship



CATALOG 850



OVERVIEW

LABORATORY & FUME EXHAUST FANS

Laboratories and research facilities exhaust a wide variety of harmful fumes. In concentrated forms, these fumes can be hazardous to human life. Contaminated air must be exhausted in a way that prevents it from returning back into the building, and surrounding locations where people may be present. To effectively exhaust these fumes, which in many cases are corrosive and/or explosive in nature, fans are connected to one or more fume hoods to draw the contaminated air through. For proper ventilation, exhaust fans must be capable of moving air at high velocities to achieve a high plume height, as well as entraining clean ambient air to dilute the chemical concentration in the airstream. Twin City Fan offers a complete line of laboratory & fume exhaust fans for meeting the most stringent industry standards. Our laboratory exhaust fans are often constructed of specialty materials to withstand the fumes associated with these environments.

APPLICATIONS

Odor Control, Chemical Processing, Fume Hood Exhaust, Energy Recovery Systems, Industrial Processes, Diesel Generators

WHEEL TYPES

Flat-Bladed Backward Inclined and Airfoil Centrifugal, Mixed Flow

COMMON ACCESSORIES

Mixing Plenum Box, Bypass Dampers, Isolation Dampers, 2-Position Spring Return Actuator, OSHA Belt Guards, Shaft & Bearing Guards, Vortex Breakers, Inlet Screens, Special Coatings, Roof Curbs, Piezometer Flow Measurement Rings, and Disconnect Switches.

OPTIONAL CONSTRUCTION

Spark Resistant Construction (Type B and C), High Temperature

CERTIFICATIONS

AMCA Sound/Air, UL 705 Listed for Electrical



Model BCIFE
Generator Exhaust



Model TVIFE
Lab Exhaust



Model TVIFE
Lab Exhaust



Model TFE
Lab Exhaust

TVIFE

INDUCED FLOW MIXED FLOW EXHAUST FAN, DIRECT DRIVE

- > 12.25 to 66 inches (315 mm to 1,680 mm) wheel diameters
- > Airflow to 71,000 CFM (120,600 m³/hour)
- > Static pressure to 8 inches w.g. (1,990 Pa)
- > AMCA licensed for Induced Flow Sound and Air
- > UL 705 listing available



CATALOG 1090



QIFE

INDUCED FLOW MIXED FLOW EXHAUST FAN, BELT DRIVEN

- > 12.25 to 66 inches (315 mm to 1,680 mm) wheel diameters
- > Airflow to 71,000 CFM (120,600 m³/hour)
- > Static pressure to 8 inches w.g. (1,990 Pa)
- > AMCA licensed for Induced Flow Sound and Air
- > UL 705 listing available



CATALOG 1080



BAIFE

INDUCED FLOW CENTRIFUGAL EXHAUST FAN, AIRFOIL BLADE

- > 12.25 to 66 inches (315 mm to 1,680 mm) wheel diameters
- > Airflow to 135,000 CFM (229,400 m³/hour)
- > Static pressure to 16 inches w.g. (3,980 Pa)
- > AMCA licensed for Induced Flow Sound and Air
- > UL 705 listing available



CATALOG 390



BCIFE

INDUCED FLOW CENTRIFUGAL EXHAUST FAN, BACKWARD INCLINED,

- > 12.25 to 66 inches (315 mm to 1,680 mm) wheel diameters
- > Airflow to 132,000 CFM (224,300 m³/hour)
- > Static pressure to 15 inches w.g. (3,730 Pa)
- > UL 705 listing available



CATALOG 390





QFE

FUME HOOD MIXED FLOW EXHAUST FAN, BELT DRIVEN

- > 18.25 to 44.5 inches (465 mm to 1,130 mm) wheel diameters
- > Airflow to 36,000 CFM (61,200 m³/hour)
- > Static pressure to 7 inches w.g. (1,740 Pa)
- > UL 705 listing available

CATALOG 1500



TFE

FUME HOOD INLINE EXHAUST FAN, BELT DRIVEN

- > 12.25 to 36.5 inches (315 mm to 930 mm) wheel diameters
- > Airflow to 37,300 CFM (63,400 m³/hour)
- > Static pressure to 7 inches w.g. (1,740 Pa)
- > UL 705 listing available

CATALOG 1500




ENERGY RECOVERY SYSTEMS

LAB EXHAUST APPLICATIONS

Twin City Fan's energy recovery systems combine high efficiency fume exhaust fans with the latest in energy recovery technology. Utilizing an energy recovery system can greatly reduce your energy consumption and carbon footprint while simultaneously increasing your bottom line. Our energy recovery plenums are available in endless configurations to match your specific needs.

OPTIONAL ACCESSORIES

- > Heat exchanger bypass mode
- > Custom coatings
- > Special materials of construction
- > Fiberglass wall insulation

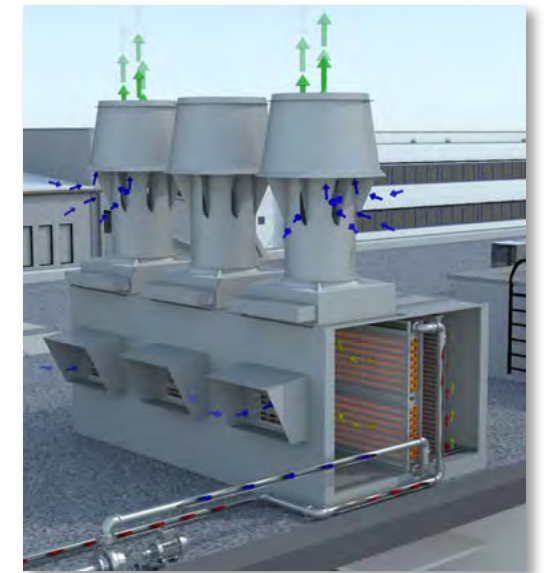



OVERVIEW

FIBERGLASS FANS

Fiberglass Fans are specifically designed for the exhaust of moisture-laden, corrosive, or chemically contaminated air. All fans feature molded fiberglass housings that are virtually impossible to dent, crack, or break. FRP offers a more economical solution compared to stainless steel or other exotic alloys. Multiple wheel types and materials are available to meet any corrosive process requirements while maintaining quiet operation and high efficiency.

WHEEL/PROPELLER TYPES

Single Thickness Backward Inclined, Airfoil, Open Radial, Axial, Propeller

TYPICAL INDUSTRIES

Agriculture, Air Pollution Control, Automotive, Car Wash, Cement, Chemical, Coal, Composting, Ethanol, Fertilizer, Food & Beverage, Foundry, General Manufacturing, Glass, HVAC, Industrial Processes, Institutional & Hospitality, Marine, Metal & Minerals, Mining, OEM, Petrochemical, Pharmaceutical, Power Generation, Pulp & Paper, Steel Processing, Textile, Water Treatment

COMMON ACCESSORIES

OSHA Belt Guards, Shaft and Bearing Guards, Inlet and Outlet Guards, Weather Covers, Shaft Seals, Access Doors, Inspection Doors, Cleanout Doors, Housing Drains, Flanged Inlets and Outlets, Dampers and Shutters, Unitary Bases

OPTIONAL CONSTRUCTION

Static Grounding, ASTM D4167 Construction, Stainless Steel Fan Shaft, Synthetic Surface Veil, Fire Retardant Resin, Vinyl Ester



Model BCSF
Scrubber Fan



Model BCSF
Odor Control, Waste Management



Model BCSF
Odor Control, Waste Water Treatment




Model BCSF
Paper Mill



BCSF

BACKWARD CURVED HIGH PRESSURE COMPOSITE FANS, SWSI

- > 16.5 to 60 inches (420 mm to 1,525 mm) wheel diameters
- > Airflow to 147,000 CFM (249,800 m³/hour)
- > Static pressure to 26 inches w.g. (6,460 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > **Typical Applications:** Chemical/Corrosive Environments, Marine, Water Treatment, Air Pollution Control, Exhaust Applications, Process Air, Explosion-Proof Processes, General HVAC, High Moisture Environments

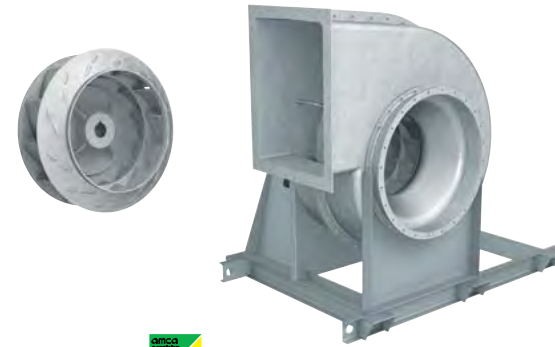


CATALOG 410

BAFF

FIBERGLASS SW AIRFOIL FAN, BIA WHEEL

- > 12.4 to 39.4 inches (315 mm to 1,000 mm) wheel diameters
- > Airflow to 31,100 CFM (52,800 m³/hour)
- > Static pressure to 13 inches w.g. (3,230 Pa)
- > **Typical Applications:** Chemical/Corrosive Environments, Marine, Water Treatment, Exhaust Applications, Explosion-Proof Processes, Air Pollution Control, Process Air, High Moisture Environments, General HVAC

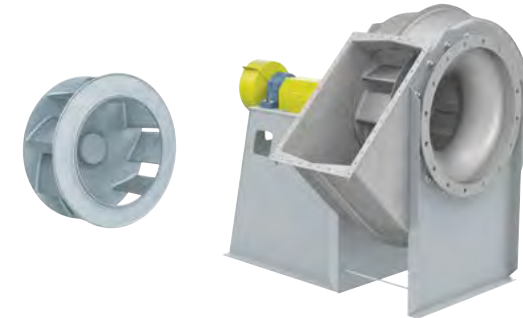


CATALOG 430

RBOF

FIBERGLASS RADIAL BLADE CENTRIFUGAL FAN

- > 10.63 to 57.5 inches (270 mm to 1,465 mm) wheel diameters
- > Airflow to 38,300 CFM (65,100 m³/hour)
- > Static pressure to 18 inches w.g. (4,480 Pa)
- > AMCA licensed for Air and Fan Efficiency Grade
- > **Typical Applications:** Chemical/Corrosive Environments, Marine, Water Treatment, Exhaust Applications, Process Air, Explosion-Proof Processes, Air Pollution Control, General HVAC, High Moisture Environment

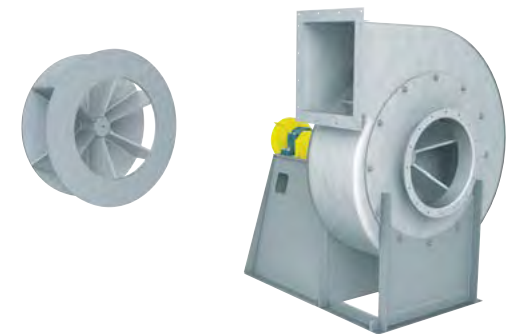


CATALOG 430 & 431


HPF

FIBERGLASS HIGH PRESSURE BLOWER, RADIAL BLADE

- > 18 to 28 inches (460 mm to 715 mm) wheel diameters
- > Airflow to 4,700 CFM (8,000 m³/hour)
- > Static pressure to 36 inches w.g. (8,950 Pa)
- > **Typical Applications:** Exhaust Applications, Water Treatment, Explosion-Proof Processes, Chemical/Corrosive Environments, Air Pollution Control, Process Air, High Moisture Environments, General HVAC, Marine

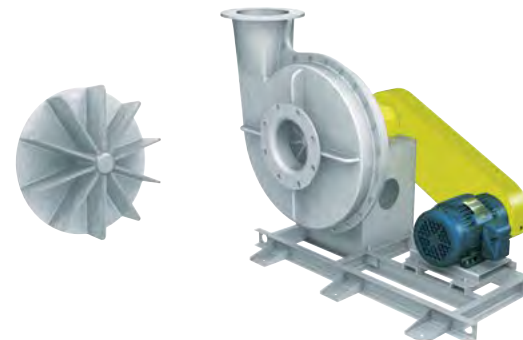

CATALOG 430

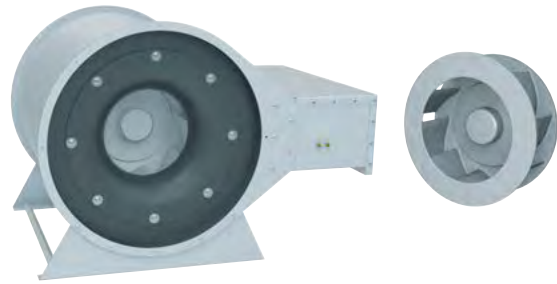

ILCF

FIBERGLASS INLINE CENTRIFUGAL FAN

- > 12.4 to 39.4 inches (315 mm to 1,000 mm) wheel diameters
- > Airflow to 35,900 CFM (61,000 m³/hour)
- > Static pressure to 7 inches w.g. (1,740 Pa)
- > **Typical Applications:** Exhaust Applications, Water Treatment, Marine, Chemical/Corrosive Environments, Air Pollution Control, Process Air, High Moisture Environments

CATALOG 430

VAHF

FIBERGLASS TYPE TF VANEAXIAL FAN, BELT DRIVEN

- > 12 to 60 inches (305 mm to 1,525 mm) wheel diameters
- > Airflow to 81,200 CFM (138,000 m³/hour)
- > Static pressure to 4 inches w.g. (1,000 Pa)
- > **Typical Applications:** Exhaust Applications, Water Treatment, Marine, Chemical/Corrosive Environments, Air Pollution Control, Process Air, High Moisture Environments



CATALOG 430



PRVF

FIBERGLASS TUBEAXIAL ROOF VENTILATOR

- > 14 to 60 inches (355 mm to 1,525 mm) wheel diameters
- > Airflow to 50,800 CFM (86,300 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > **Typical Applications:** Exhaust Applications, Water Treatment, Marine, Chemical/Corrosive Environments, Air Pollution Control, Process Air, High Moisture Environments

CATALOG 430

TCWPF

FIBERGLASS PANEL FAN, DIRECT DRIVE

- > 12 to 48 inches (305 mm to 1,220 mm) wheel diameters
- > Airflow to 41,900 CFM (71,200 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > **Typical Applications:** Corrosive Environments, General HVAC, Marine, Waste Water Treatment, High Moisture Environments, Swimming Pools



CATALOG 430



TAMF

FIBERGLASS TYPE FG7 TUBEAXIAL FAN, BELT DRIVEN

- > 14 to 60 inches (355 mm to 1,525 mm) wheel diameters
- > Airflow to 51,900 CFM (88,200 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > **Typical Applications:** Exhaust Applications, Water Treatment, Marine, Chemical/Corrosive Environments, Air Pollution Control, Process Air, High Moisture Environments

CATALOG 430

FA

FIBERGLASS DOWNBLAST CENTRIFUGAL ROOF VENTILATOR DIRECT DRIVE

- > 7 to 18.5 inches (180 mm to 470 mm) wheel diameters
- > Airflow to 3,125 CFM (5,300 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > **Typical Applications:** Chemical/Corrosive Environments, High Moisture Environments, Marine, General HVAC, Swimming Pools, Waste Water Treatment



CATALOG 3000



TAHF

FIBERGLASS TYPE TF TUBEAXIAL FAN, BELT DRIVEN

- > 12 to 60 inches (305 mm to 1,525 mm) wheel diameters
- > Airflow to 83,200 CFM (141,400 m³/hour)
- > Static pressure to 2.5 inches w.g. (620 Pa)
- > **Typical Applications:** Exhaust Applications, Water Treatment, Marine, Chemical/Corrosive Environments, Air Pollution Control, Process Air, High Moisture Environments

CATALOG 430

FAB

FIBERGLASS DOWNBLAST CENTRIFUGAL ROOF VENTILATOR BELT DRIVEN

- > 12.5 to 40 inches (320 mm to 1,020 mm) wheel diameters
- > Airflow to 19,500 CFM (33,100 m³/hour)
- > Static pressure to 1.75 inches w.g. (440 Pa)
- > **Typical Applications:** Chemical/Corrosive Environments, High Moisture Environments, Marine, General HVAC, Swimming Pools, Waste Water Treatment



CATALOG 3000



WA

FIBERGLASS UPBLAST CENTRIFUGAL ROOF VENTILATOR, DIRECT DRIVE

- > 7 to 18.5 inches (180 mm to 470 mm) wheel diameters
- > Airflow to 3,030 CFM (5,100 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > **Typical Applications:** Chemical/Corrosive Environments, High Moisture Environments, General HVAC, Exhaust Applications, Marine, Swimming Pools, Waste Water Treatment

CATALOG 3000



WAB

FIBERGLASS UPBLAST CENTRIFUGAL ROOF VENTILATOR, BELT DRIVEN

- > 14.5 to 40 inches (370 mm to 1,020 mm) wheel diameters
- > Airflow to 21,500 CFM (36,500 m³/hour)
- > Static pressure to 2 inch w.g. (500 Pa)
- > **Typical Applications:** Chemical/Corrosive Environments, High Moisture Environments, General HVAC, Exhaust Applications, Marine, Swimming Pools, Waste Water Treatment

CATALOG 3000



HA

FIBERGLASS CENTRIFUGAL WALL VENTILATOR, DIRECT DRIVE

- > 7 to 18.5 inches (180 mm to 470 mm) wheel diameters
- > Airflow to 2,625 CFM (4,500 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > **Typical Applications:** Chemical/Corrosive Environments, High Moisture Environments, General HVAC, Exhaust Applications, Marine, Swimming Pools, Waste Water Treatment

CATALOG 3000



HAB

FIBERGLASS CENTRIFUGAL WALL VENTILATOR, BELT DRIVEN

- > 12.5 to 30.5 inches (320 mm to 770 mm) wheel diameters
- > Airflow to 9,820 CFM (16,700 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > **Typical Applications:** Chemical/Corrosive Environments, High Moisture Environments, General HVAC, Exhaust Applications, Marine, Swimming Pools, Waste Water Treatment

CATALOG 3000



SA

FIBERGLASS CENTRIFUGAL WALL VENTILATOR, DIRECT DRIVE

- > 7 to 14.5 inches (180 mm to 370 mm) wheel diameters
- > Airflow to 2,230 CFM (3,800 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > **Typical Applications:** Chemical/Corrosive Environments, High Moisture Environments, General HVAC, Exhaust Applications, Marine, Swimming Pools, Waste Water Treatment

CATALOG 3000



FR

FIBERGLASS ROUND GRAVITY RELIEF & INTAKE VENTILATOR

- > 14 to 45.5 inches (355 mm to 1,155 mm) square throat sizes
- > Airflow to 12,850 CFM (21,800 m³/hour)
- > Static pressure to 0.25 inches w.g. (60 Pa)
- > **Typical Applications:** Gravity Relief

CATALOG 3000



MA

FIBERGLASS SQUARE GRAVITY RELIEF & INTAKE VENTILATOR

- > 6 to 60 inches (155 mm to 1,525 mm) square throat sizes
- > Airflow to 40,000 CFM (68,000 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > **Typical Applications:** Gravity Relief

CATALOG 3000

FIBERGLASS ROOF CURBS

PREFABRICATED ROOF CURBS

- > 12" high prefabricated roof curb
- > 3 1/2" cant, corner gussets
- > Treated 1 1/2" x 3 1/2" treated wood nailer
- > Damper tray
- > **Options:** 2" thick fiberglass insulation



CATALOG 4910

KITCHEN & RESTAURANT EXHAUST FANS



OVERVIEW

KITCHEN & RESTAURANT EXHAUST FANS

Kitchens and restaurants require specialized equipment for exhausting grease contaminated air. Ovens, stoves, grills and dishwashers produce moist, hot, smoky, and grease-laden air that must be removed from the kitchen and discharged away from building surfaces. Twin City Fan offers a full line of UL 762 listed kitchen exhaust fans and grease collection systems that are designed for kitchen and restaurant use.

WHEEL TYPES

Backward Inclined Centrifugal, Mixed Flow

COMMON ACCESSORIES

Grease Box and Drain Connections, Belt Guards, Motor Covers, Inlet/Outlet Screens and Guards, Inlet/Outlet Companion Flanges, Insulated Jackets, Vented Roof Curbs, Special Coatings, Disconnect Switches

CERTIFICATIONS

AMCA Sound/Air and FEG, UL 705 Listed for Electrical, UL 762 Listed for the Exhaust of Grease Laden Air, OSHPD Seismic Preapproval per OSP-0395-10, Miami-Dade County Hurricane Rating Per NOA No. 12-0914.12

APPLICATIONS

Kitchen Exhaust, Dishwasher Exhaust



Model DCRUR
Grease Hood Exhaust



Model BCRUR
Kitchen Exhaust



Model BCRUR
Kitchen Exhaust



DCRUR

CENTRIFUGAL KITCHEN ROOF EXHAUSTER, UPBLAST, DIRECT DRIVE
UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR

- > 8.38 to 18.25 inches (215 mm to 465 mm) wheel diameters
- > Airflow to 3,865 CFM (6,600 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 762 listed for Grease Laden Air



Available With
EC Motor



Available For
Quickship



CATALOG 4105

BCRUR

CENTRIFUGAL KITCHEN ROOF EXHAUSTER, UPBLAST, BELT DRIVEN
UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR

- > 12.25 to 39.37 inches (315 mm to 1,000 mm) wheel diameters
- > Airflow to 17,400 CFM (29,600 m³/hour)
- > Static pressure to 3.25 inches w.g. (810 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 762 listed for Grease Laden Air



Available For
Quickship



CATALOG 4105

DCRWR

CENTRIFUGAL KITCHEN WALL EXHAUSTER, DIRECT DRIVE
UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR

- > 8.38 to 18.25 inches (215 mm to 465 mm) wheel diameters
- > Airflow to 3,865 CFM (6,600 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 762 listed for Grease Laden Air



Available For
Quickship



CATALOG 4105

BCRWR

CENTRIFUGAL KITCHEN WALL EXHAUSTER, BELT DRIVEN
UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR


- > 12.25 to 31.5 inches (315 mm to 800 mm) wheel diameters
- > Airflow to 11,600 CFM (19,700 m³/hour)
- > Static pressure to 3.25 inches w.g. (810 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 762 listed for Grease Laden Air



Available For
Quickship



CATALOG 4105

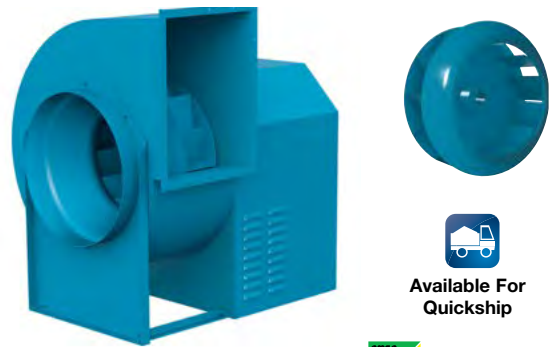

BCVU2

FLAT-BLADED BACKWARD INCLINED UTILITY SETS
UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR

- > 12.25 to 36.5 inches (315 mm to 930 mm) wheel diameters
- > Airflow to 29,100 CFM (49,400 m³/hour)
- > Static pressure to 8 inches w.g. (1,990 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 762 listed for Grease Laden Air



CATALOG 600

TCLBR

TUBULAR CENTRIFUGAL RESTAURANT INLINE FAN, BELT DRIVEN
UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR


- > 10.5 to 49 inches (270 mm to 1,245 mm) wheel diameters
- > Airflow to 41,700 CFM (70,800 m³/hour)
- > Static pressure to 4 inches w.g. (990 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 762 listed for Grease Laden Air



Available For Quickship



CATALOG 4215

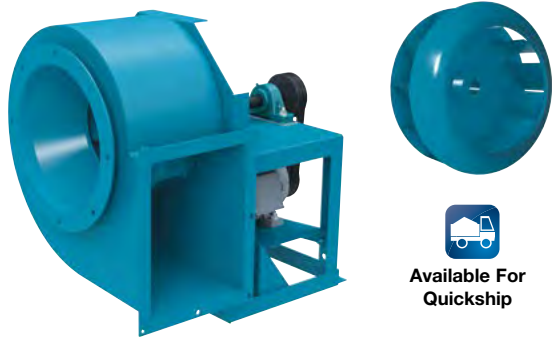

BCJU2

FLAT-BLADED BACKWARD INCLINED JUNIOR UTILITY SETS
UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR

- > 9 to 10.5 inches (230 mm to 270 mm) wheel diameters
- > Airflow to 1,900 CFM (3,200 m³/hour)
- > Static pressure to 5 inches w.g. (1,240 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 762 listed for Grease Laden Air



CATALOG 551

BHRE

HINGED RESTAURANT EXHAUST FAN, BELT DRIVEN
UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR

- > 10.5 to 24.5 inches (270 mm to 625 mm) wheel diameters
- > Airflow to 9,000 CFM (15,300 m³/hour)
- > Static pressure to 5 inches w.g. (1,240 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 705 and 762 listing available
- > **Typical Applications:** Kitchen Exhaust, Dishwasher Exhaust



CATALOG 610



QCLBR

LOW PRESSURE RESTAURANT MIXED FLOW FAN
UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR

- > 12.25 to 73 inches (315 mm to 1,855 mm) wheel diameters
- > Airflow to 105,000 CFM (178,400 m³/hour)
- > Static pressure to 4.5 inches w.g. (1,120 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 762 listed for Grease Laden Air




CATALOG 1070

SELF FLASHING VENTED ROOF CURBS

FOR HIGH TEMPERATURE APPLICATIONS

- > Completely assembled unit, easier to install and less expensive than a field constructed curb
- > Constructed of 18-gauge galvanized steel with continuous welded seams with wide base flashing for weathertight seal to roof
- > Meets NFPA-96 code requirements
- > Top ledge covered with 3/16" polystyrene gasket
- > Furnished with ventilation slots

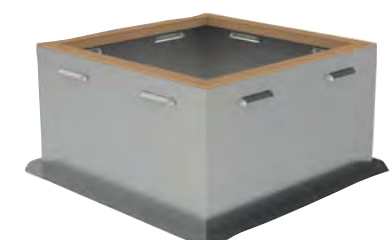

CATALOG 4910



QSLR

RESTAURANT MIXED FLOW FAN
UL 762 LISTED FOR THE EXHAUST OF GREASE LADEN AIR

- > 18.25 to 89 inches (465 mm to 2,260 mm) wheel diameters
- > Airflow to 160,000 CFM (271,800 m³/hour)
- > Static pressure to 8 inches w.g. (1,990 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL 762 listed for Grease Laden Air



CATALOG 1060





OVERVIEW

SMOKE & HEAT EXHAUST FANS

Emergency smoke exhaust systems are designed to remove smoke and heat from buildings in the event of a fire. These systems play a crucial role in increasing occupant safety and allowing rescue personnel to safely enter burning buildings. Twin City Fan offers a full line of smoke and heat fans capable of withstanding a minimum temperature of 500°F for four hours or 1,000°F for 15 minutes. Our inline smoke and heat fans are also available in a vertical roof mount or horizontal discharge configuration featuring a discharge cap with butterfly dampers and a fusible link designed to stay open in the event of a fire.

WHEEL/PROPELLER TYPES

Backward Inclined Centrifugal, Mixed Flow, Axial

COMMON ACCESSORIES

Belt Tube, Copper Extended Lube Lines, Access Doors, Belt Guards, Motor Covers, Inlet/Outlet Screens and Guards, Inlet/Outlet Companion Flanges, Insulated Jackets, Vented Roof Curbs, Special Coatings, and Disconnect Switches

CERTIFICATIONS

AMCA Sound/Air and FEG, UL 705 Listed for Electrical, UL Listed for Smoke Control Systems, OSHPD Seismic Preapproval per OSP-0195-10 and OSP-0271-10

APPLICATIONS

General Emergency Smoke Exhaust, Elevator Shaft Exhaust/Pressurization, Stairwell Pressurization



Model TUBSH
Smoke Control - University



Model BCRUSH
Smoke Control - Retail



Model TCVSSH
Elevator Shaft Exhaust



Model QLSH
Smoke Control - Amphitheater

BCRUSH

SMOKE & HEAT REMOVAL CENTRIFUGAL FAN, BELT DRIVEN
UL LISTED FOR SMOKE CONTROL SYSTEMS

- > 12.25 to 49.21 inches (315 mm to 1,250 mm) wheel diameters
- > Airflow to 29,100 CFM (49,400 m³/hour)
- > Static pressure to 3.25 inches w.g. (810 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL listed for Smoke Control Systems



Available For Quickship



CATALOG 4105


BCVSH

FLAT-BLADED BACKWARD INCLINED UTILITY SETS
UL LISTED FOR SMOKE CONTROL SYSTEMS

- > 12.25 to 36.5 inches (315 mm to 930 mm) wheel diameters
- > Airflow to 29,100 CFM (49,400 m³/hour)
- > Static pressure to 8 inches w.g. (1,990 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL listed for Smoke Control Systems



Available For Quickship



CATALOG 600

QCLBSH

LOW PRESSURE SMOKE & HEAT MIXED FLOW FAN
UL LISTED FOR SMOKE CONTROL SYSTEMS

- > 12.25 to 73 inches (315 mm to 1,855 mm) wheel diameters
- > Airflow to 105,000 CFM (178,400 m³/hour)
- > Static pressure to 4.5 inches w.g. (1,120 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL listed for Smoke Control Systems



CATALOG 1070


QLSLH

SMOKE & HEAT MIXED FLOW FAN
UL LISTED FOR SMOKE CONTROL SYSTEMS

- > 18.25 to 89 inches (465 mm to 2,260 mm) wheel diameters
- > Airflow to 160,000 CFM (271,800 m³/hour)
- > Static pressure to 8 inches w.g. (1,990 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL listed for Smoke Control Systems



CATALOG 1060



LUBSH

SMOKE & HEAT LOW PROFILE PROPELLER ROOF VENTILATOR
UL LISTED FOR SMOKE CONTROL SYSTEMS

- > 21 to 60 inches (535 mm to 1,525 mm) wheel diameters
- > Airflow to 60,800 CFM (103,300 m³/hour)
- > Static pressure to 1 inch w.g. (250 Pa)
- > UL listed for Smoke Control Systems



CATALOG 4870



TUBSH

SMOKE & HEAT REMOVAL ROOF VENTILATOR, BELT DRIVEN
UL LISTED FOR SMOKE CONTROL SYSTEMS

- > 24 to 60 inches (610 mm to 1,525 mm) wheel diameters
- > Airflow to 70,700 CFM (120,100 m³/hour)
- > Static pressure to 1.5 inches w.g. (370 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL listed for Smoke Control Systems



CATALOG 4850



TBSH

SMOKE & HEAT REMOVAL TUBEAXIAL FAN, BELT DRIVEN
UL LISTED FOR SMOKE CONTROL SYSTEMS

- > 24 to 60 inches (610 mm to 1,525 mm) wheel diameters
- > Airflow to 82,600 CFM (140,300 m³/hour)
- > Static pressure to 1.25 inches w.g. (310 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade
- > UL listed for Smoke Control Systems



CATALOG 4830



TCVSSH

SMOKE & HEAT VANEAXIAL FAN, STEEL WHEEL
UL LISTED FOR SMOKE CONTROL SYSTEMS

- > 12 to 54 inches (305 mm to 1,375 mm) wheel diameters
- > Airflow to 80,000 CFM (135,900 m³/hour)
- > Static pressure to 4 inches w.g. (990 Pa)
- > UL listed for Smoke Control Systems



CATALOG AX250

TCTSSH

SMOKE & HEAT TUBEAXIAL FAN, STEEL WHEEL
UL LISTED FOR SMOKE CONTROL SYSTEMS

- > 12 to 54 inches (305 mm to 1,375 mm) wheel diameters
- > Airflow to 80,000 CFM (135,900 m³/hour)
- > Static pressure to 4 inches w.g. (990 Pa)
- > UL listed for Smoke Control Systems




CATALOG AX250

SELF FLASHING VENTED ROOF CURBS


FOR HIGH TEMPERATURE APPLICATIONS

- > Completely assembled unit, easier to install and less expensive than a field constructed curb
- > Constructed of 18-gauge galvanized steel with continuous welded seams with wide base flashing for weathertight seal to roof
- > Meets NFPA-96 code requirements
- > Top ledge covered with 3/16" polystyrene gasket
- > Furnished with ventilation slots

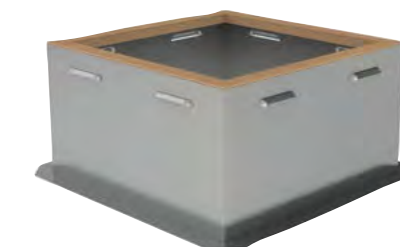

CATALOG 4910

Twin City Fan & Blower's Ventco product line consists of a variety of light commercial centrifugal fans specifically for use by OEMs (Original Equipment Manufacturers) in the HVAC industry. Designed primarily to handle clean air and economically provide large air volumes in a compact design, these fans are ideal for commercial and light industrial applications within air handling units, air make-up units, direct fired air heaters, fresh air ventilation, and other cooling and ventilating applications. All fans can be driven from both sides and mounted in any of four standard discharge configurations.




TFC

FORWARD CURVED, DOUBLE WIDTH, DOUBLE INLET

- > 7 to 36.5 inches (180 mm to 930 mm) wheel diameters
- > Airflow to 80,000 CFM (135,900 m³/hour)
- > Static pressure to 6.5 inches w.g. (1,620 Pa)

CATALOG 5100

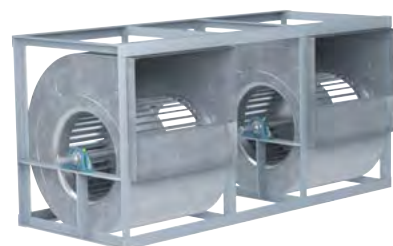

TFC-2

FORWARD CURVED, DOUBLE FAN, DOUBLE WIDTH, DOUBLE INLET

- > 7 to 36.5 inches (180 mm to 930 mm) wheel diameters
- > Airflow to 160,000 CFM (271,800 m³/hour)
- > Static pressure to 6.5 inches w.g. (1,620 Pa)

CATALOG 5100




VFC

FORWARD CURVED, DOUBLE WIDTH, DOUBLE INLET

- > 8 to 39.5 inches (205 mm to 1,005 mm) wheel diameters
- > Airflow to 65,000 CFM (110,400 m³/hour)
- > Static pressure to 7 inches w.g. (1,740 Pa)
- > AMCA licensed for Sound, Air and Fan Efficiency Grade

CATALOG 5200

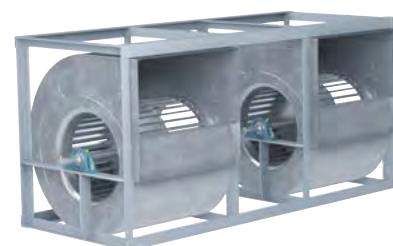

VFC-2

FORWARD CURVED, DOUBLE FAN, DOUBLE WIDTH, DOUBLE INLET

- > 8 to 39.5 inches (205 mm to 1,005 mm) wheel diameters
- > Airflow to 130,000 CFM (220,800 m³/hour)
- > Static pressure to 7 inches w.g. (1,740 Pa)

CATALOG 5200

VBC

BACKWARD INCLINED, DOUBLE WIDTH, DOUBLE INLET

- > 8 to 39.8 inches (205 mm to 1,015 mm) wheel diameters
- > Airflow to 80,000 CFM (135,900 m³/hour)
- > Static pressure to 14 inches w.g. (3,480 Pa)
- > AMCA licensed Sound, Air & Fan Efficiency Grade




CATALOG 5300

VBC-2

BACKWARD INCLINED DOUBLE FAN, DOUBLE WIDTH, DOUBLE INLET

- > 8 to 39.8 inches (205 mm to 1,015 mm) wheel diameters
- > Airflow to 160,000 CFM (271,800 m³/hour)
- > Static pressure to 14 inches w.g. (3,480 Pa)

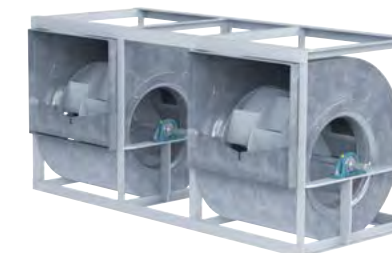

CATALOG 5300

VAF

AIRFOIL, DOUBLE WIDTH, DOUBLE INLET

- > 11.4 to 39.8 inches (290 mm to 1,015 mm) wheel diameters
- > Airflow to 55,000 CFM (93,400 m³/hour)
- > Static pressure to 14 inches w.g. (3,480 Pa)



CATALOG 5400

VAF-2

AIRFOIL, DOUBLE FAN, DOUBLE WIDTH, DOUBLE INLET

- > 11.4 to 39.8 inches (290 mm to 1,015 mm) wheel diameters
- > Airflow to 110,000 CFM (186,800 m³/hour)
- > Static pressure to 14 inches w.g. (3,480 Pa)



CATALOG 5400

